

FOAM FILLER MATERIAL
NUMBER 96720-0001
SEE NOTE 4

PACKAGING TRAY
(SEE CHART)
(1) EMPTY
(4) FULL


STRETCH WRAP
8525-0003
SEE NOTE 5

PRIMARY CARTON 96707-1003
OR 96707-0003

LABEL TO BE
LOCATED AS SHOWN

NOTES:

- PARTS TO BE ORIENTED IN PACKAGING TRAYS AS SHOWN.
- REFER TO CHART FOR PACKAGING TRAY MATERIAL NUMBER.
- 96707-1003 OR 96707-0003 PRIMARY SHIPPING CARTON TO BE SEALED WITH 2.0 INCH WIDE TAPE.
- USE FOAM FILLER AS REQUIRED TO TAKE UP EXCESS SPACE INSIDE CARTON.
- STRETCH WRAP SHOULD BE USED IN THE AREAS SHOWN. WRAP STACK WITH A MINIMUM OF 3-5 WRAPS.

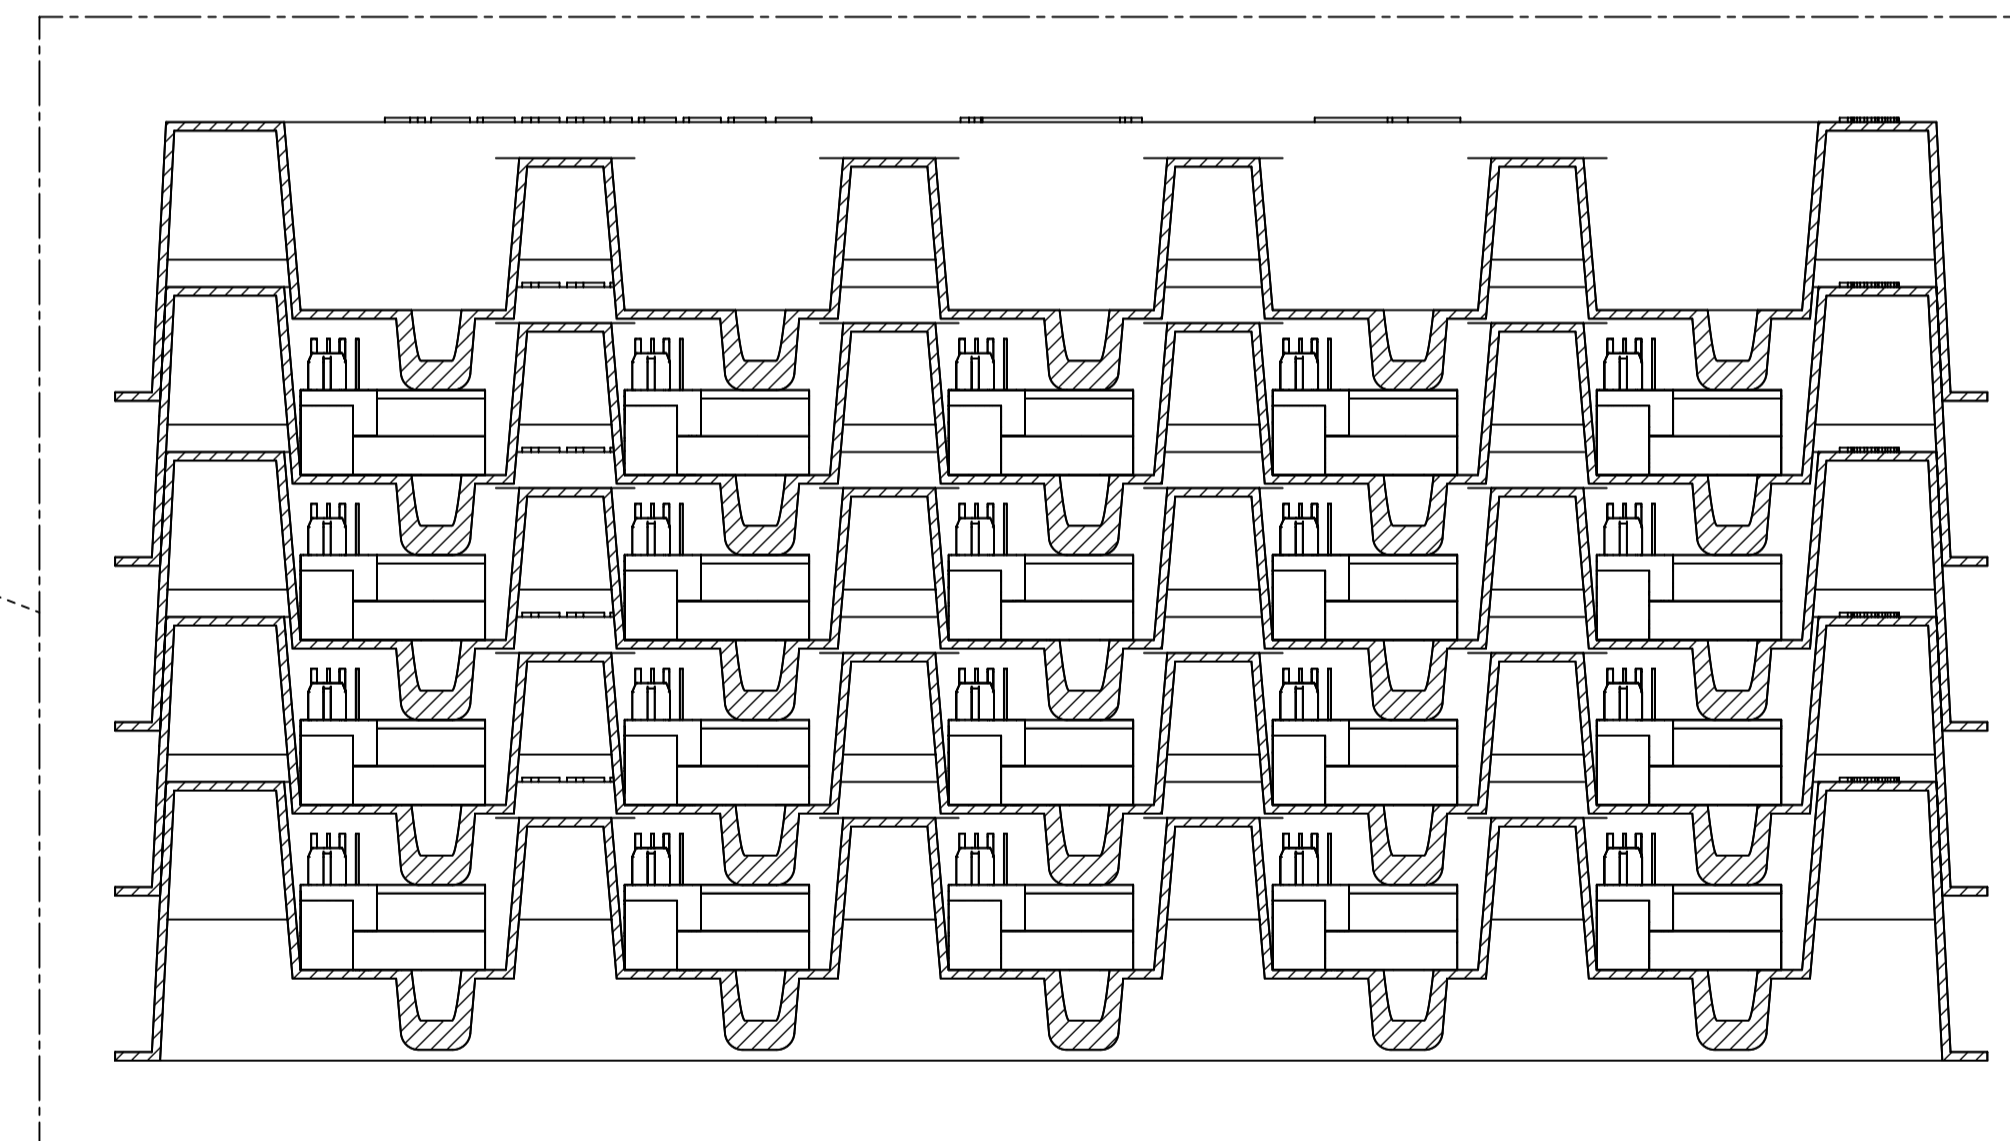

PART ORIENTATION IN TRAY

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
	DIMENSION UNITS	SCALE	CURRENT REV DESC: ADDED 45985-8409 AND 45984-8409
$\frac{E}{A} = 0$	mm	1:1	EC NO: 686727 DRWN: CHETAB CHK'D: HTHYAGARAJ APPR: HTHYAGARAJ
$\frac{E}{C} = 0$	GENERAL TOLERANCES (UNLESS SPECIFIED)		
DIVISIONAL SYMBOLS		MM	INCH
	4 PLACES	±	±
	3 PLACES	±	±
	2 PLACES	± 0.13	±
	1 PLACE	± 0.25	±
	0 PLACES	±	±
	ANGULAR TOL	± 0.5 °	
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIRD ANGLE PROJECTION	DRAWING SERIES
			A1-SIZE 45984
			MATERIAL NUMBER CUSTOMER SHEET NUMBER
			SEE TABLE GENERAL MARKET 1 OF 4

molex

PACKAGING SPECIFICATION
LOW PROFILE HYBRID 45984 & 45985 SERIES

PACKAGING DESIGN DRAWING



DOCUMENT NUMBER: PK-45984-001
DOC TYPE: PDD
DOC PART: 001
REVISION: N1

STANDARD RECEPTACLES					
USE PACKAGING TRAY 46077-0003					
NUMBER OF BAYS	MATERIAL NUMBER	NUMBER OF CIRCUITS	PARTS PER CHANNEL	PARTS PER TRAY	STANDARD PACK QUANTITY PER PRIMARY CARTON (SPQ)
3	45984-0003	24	5	25	100
5	45984-0007	16	4	20	80
2	45984-0008	24	7	35	140
2	45984-0017	24	7	35	140
2	45984-0019	16	8	40	160
5	45984-0025	16	4	20	80

RECEPTACLES WITH PEGS					
USE PACKAGING TRAY 46077-0003					
NUMBER OF BAYS	MATERIAL NUMBER	NUMBER OF CIRCUITS	PARTS PER CHANNEL	PARTS PER TRAY	STANDARD PACK QUANTITY PER PRIMARY CARTON (SPQ)
2	45984-0005	24	6	30	120
4	45984-0010	12	5	25	100
4	45984-0009	24	4	20	80
2	45984-0011	24	6	30	120

RECEPTACLES WITH GUIDES/GUIDES & PEGS					
USE PACKAGING TRAY 46077-0004					
NUMBER OF BAYS	MATERIAL NUMBER	NUMBER OF CIRCUITS	PARTS PER CHANNEL	PARTS PER TRAY	STANDARD PACK QUANTITY PER PRIMARY CARTON (SPQ)
4	45984-0002	24	4	20	80
4	45984-0009	24	4	20	80
3	45984-0018	24	5	25	100
2	45984-0020	16	7	35	140
2	45984-0023	16	7	35	140

PLUGS WITH GUIDES AND/OR PEGS					
USE PACKAGING TRAY 46077-0003					
NUMBER OF BAYS	MATERIAL NUMBER	NUMBER OF SIGNALS	PARTS PER CHANNEL	PARTS PER TRAY	STANDARD PACK QUANTITY PER PRIMARY CARTON (SPQ)
4	45985-0002	24	4	20	80
3	45985-0004	12	6	30	120
2	45985-0005	24	6	30	120
4	45985-0006	40	3	15	60
4	45985-0007	20	4	20	80
3	45985-0008	12	5	25	100
5	45985-0009	32	3	15	60
6	45985-0010	24	6	30	120
2	45985-0012	20	6	30	120
2	45985-0013	12	7	35	140
2	45985-0014	12	7	35	140
3	45985-0015	12	5	25	100
2	45985-0016	16	7	35	140
2	45985-0017	40	5	25	100
4	45985-0018	40	3	15	60
4	45985-0020	12	4	20	80
4	45985-0021	40	3	15	60
2	45985-0022	12	7	35	140
3	45985-0023	20	5	25	100
4	45985-0027	12	4	20	80
2	45985-0028	16	7	35	140
2	45985-0030	16	7	35	140

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC: ADDED 45985-8409 AND 45984-8409				
	DIMENSION UNITS	SCALE					
DIVISIONAL SYMBOLS	mm	1:1	GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 686727 DRWN: CHETAB CHK'D: HTHYAGARAJ APPR: HTHYAGARAJ 2021/11/25 2021/12/14 2021/12/14		
	GENERAL TOLERANCES (UNLESS SPECIFIED)						
		MM	INCH	INITIAL REVISION: DRWN: BANDURA APPR: APATEL 2006/04/19 2006/05/18		DOCUMENT NUMBER: PK-45984-001	
		4 PLACES ±	±			DOC TYPE: PDD DOC PART: 001 REVISION: N1	
		3 PLACES ±	±	THIRD ANGLE PROJECTION 		CUSTOMER: GENERAL MARKET	
		2 PLACES ±	±			SHEET NUMBER: 4 OF 4	
		1 PLACE ±	±	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE	
		0 PLACES ±	±			A1-SIZE 45984	
		ANGULAR TOL ± 0.5 °					