

High Frequency Ceramic Solutions


868/915 MHz Impedance Matched/Balun/LPF Integrated Component for T.I. CC110X, P/N 0896BM15A0001
 CC111X, CC113X and CC115X, CC110L, CC113L, CC115L, CC430 and RF430

Detail Specification: 7/22/2024

Page 1 of 4

General Specifications

Part Number	0896BM15A0001
Operating Frequency	863 - 928 Mhz
Insertion Loss 1 (dB)	1.5 dB max (-40C to +85C)
Insertion Loss 2 (dB)	1.55 dB max (-40C to +125C)
Return Loss (dB)	9.5 min.
Unbalanced Impedance	50 Ω
Differential Balanced Impedance	Impedance-Matched to T.I. CC110X, CC111X, CC113X and CC115X, CC110L, CC113L, CC115L, CC430 and RF430 Chipsets
Attenuation (dB)	25 min.@ 1726 - 1856MHz 35 min.@ 2589 - 2784MHz 35 min.@ 3452 - 3712MHz 35 min.@ 4315 - 4640MHz
Phase Difference	180° ± 10
Amplitude Difference	1.5 dB max.

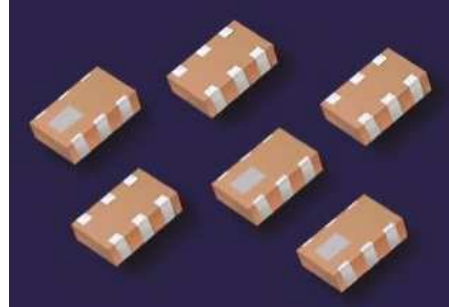

Recommended Storage Conditions for unused T&R product	+5 to +35°C Humidity 45~75%RH 18 months max.
Power Rating	1W max. (CW)
Operating Temperature	-40 to +125°C
Reel Quantity (pcs/reel)	4,000


*18 months max. in vacuum sealed bag and 1 week after opened. Please keep unused parts in vacuum sealed bags.
 For more info go to <https://www.johansontechnology.com/silverleads-profile>.

Part Number Explanation

P/N Suffix	Packing Style	Bulk	Suffix = S	E.g. 0896BM15A0001S
		T & R	Suffix = E	E.g. 0896BM15A0001E
	Termination Style	Ag/Pt	Suffix = None	E.g. 0896BM15A0001(E or S)
	Evaluation Board	50Ω SMA	Suffix = EBSMA	E.g. 0896BM15A0001-EBSMA


Mechanical Dimensions

	In	mm
L	0.079 ± 0.004	2.00 ± 0.10
W	0.049 ± 0.004	1.25 ± 0.10
T	0.028 ± 0.004	0.70 ± 0.10
a	0.012 ± 0.004	0.30 ± 0.10
b	0.008 ± 0.004	0.20 ± 0.10
c	0.012 +.004/-0.008	0.30 +0.1/-0.2
g	0.014 0 0.004	0.35 0.10
p	0.026 0 0.002	0.65 0.05

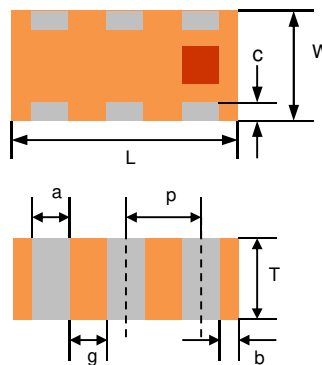

Terminal Configuration

No.	Function
1	Unbalanced Port
2	GND
3	Balanced Port
4	Balanced Port
5	GND
6	GND



Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>
 4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821
 Ver. 2.3 2020 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

868/915 MHz Impedance Matched/Balun/LPF Integrated Component for T.I. CC110X, CC111X, CC113X and CC115X, CC110L, CC113L, CC115L, CC430 and RF430

P/N 0896BM15A0001


Detail Specification: 7/22/2024

Page 2 of 4

Mounting Considerations

* Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.
Mount device with colored mark facing up.


Pin reference

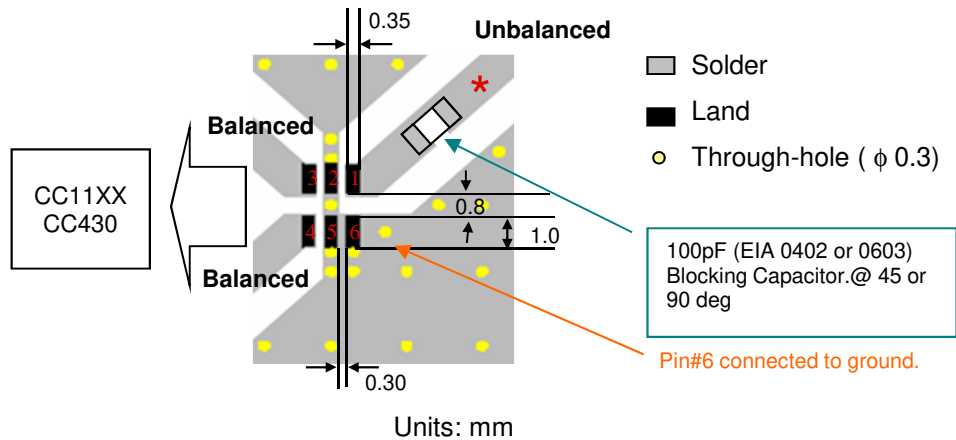

Additional output filtering may be required depending on output power in order to comply with FCC and/or ETSI regulations.
Mount device with colored mark facing up.

To obtain application notes, information how to implement this component, or obtain gerber files, go to:
<https://www.johansontechnology.com/ti>
or contact our Apps Engineering Team at:
<https://www.johansontechnology.com/ask-a-question>

Component P/N:
5.6nH Inductor: L-07C5N6SV6T
1.8pF Capacitor: 500R07S1R8BV4T

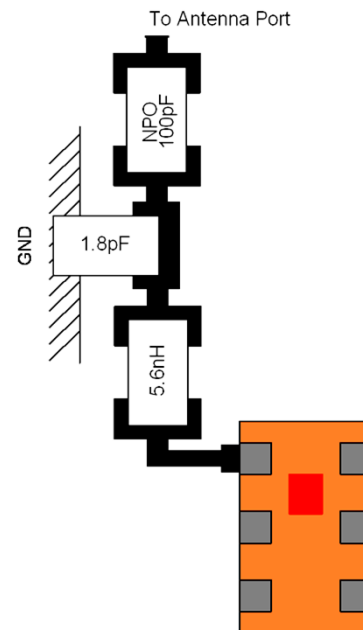

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.

High Frequency Ceramic Solutions


868/915 MHz Impedance Matched/Balun/LPF Integrated Component for T.I. CC110X, P/N 0896BM15A0001
CC111X, CC113X and CC115X, CC110L, CC113L, CC115L, CC430 and RF430

Detail Specification: 7/22/2024


Page 3 of 4

Typical Electrical Characteristics (T=25°C)

Insertion Loss & Return Loss (Sds11, and Sss11)

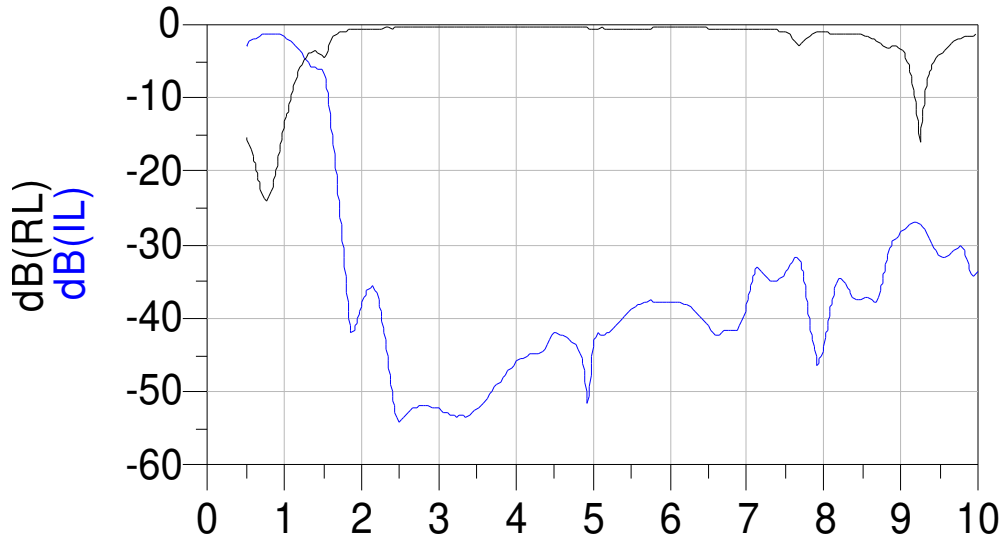

Amplitude & Phase Difference

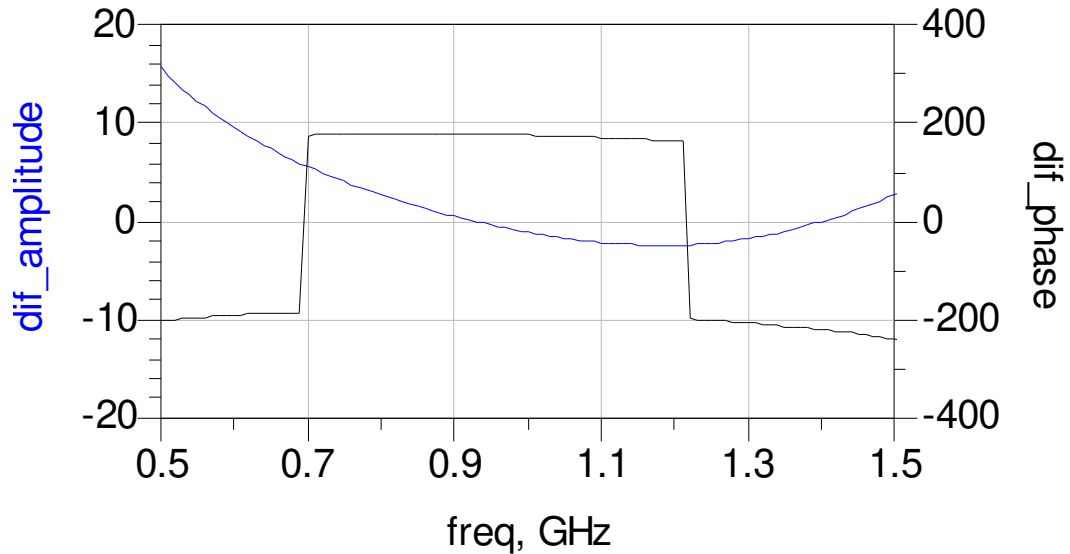

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>
4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821
Ver. 2.3 2020 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

868/915 MHz Impedance Matched/Balun/LPF Integrated Component for T.I. CC110X, P/N 0896BM15A0001
CC111X, CC113X and CC115X, CC110L, CC113L, CC115L, CC430 and RF430

Detail Specification: 7/22/2024

Page 4 of 4

Application Notes, Layout Files, and more

<https://www.johansontechnology.com/baluns>

Packaging information

<https://www.johansontechnology.com/tape-reel-packaging>

Soldering Information

<https://www.johansontechnology.com/ipcsoldering-profile>

MSL Info

<https://www.johansontechnology.com/msl-rating>

Recommended Storage Condition and Max Shelf Life

<https://www.johansontechnology.com/recommended-storage-conditions>

RoHS Compliance

<https://www.johansontechnology.com/rohs-compliance>

Antenna layout and tuning techniques

<https://www.johansontechnology.com/tuning>

Antenna layout review, tuning, and characterization services

<https://www.johansontechnology.com/ipc-antenna-services>

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



Ver. 2.3

<https://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2020 Johanson Technology, Inc. All Rights Reserved