
REVISION K

RECOMMENDED PCB LAYOUT FOR ERF8-XXX-XX-X-D-RA-X-XX

3/15/2022 ECN-429951

DESIGNED & DIMENSIONED IN MILLIMETERS[INCHES]

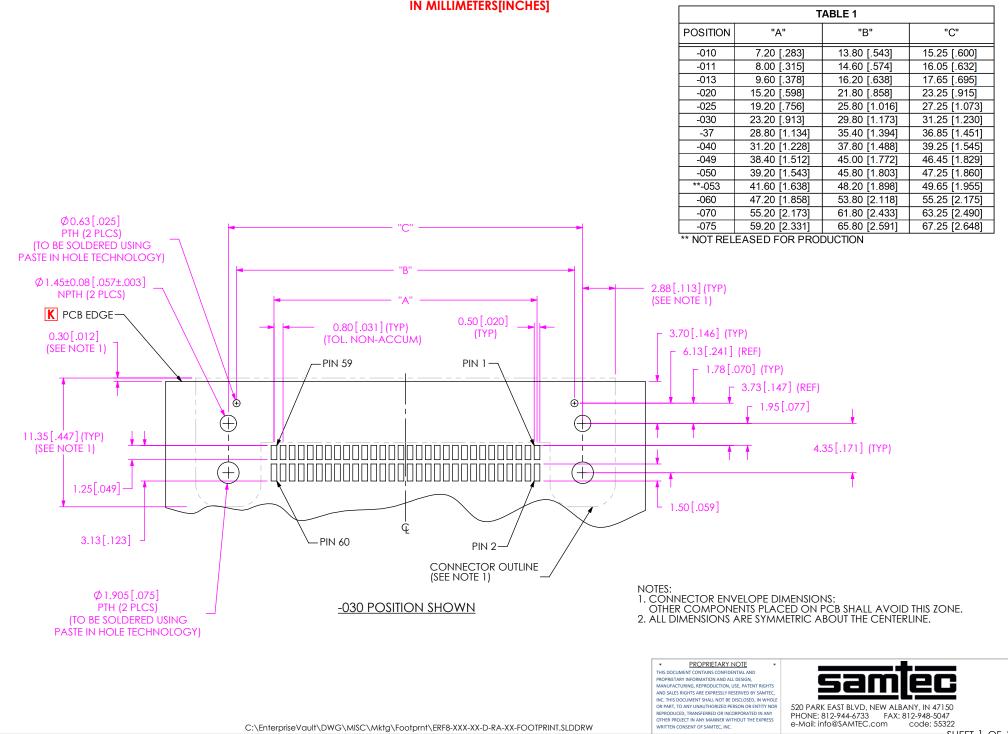

RECOMMENDED STENCIL LAYOUT FOR ERF8-XXX-XX-X-D-RA-X-XX

DESIGNED & DIMENSIONED IN MILLIMETERS[INCHES]

NOTE: STENCIL TO BE 0.15[.006] THICK.

TABLE 1			
POSITION	"A"	"B"	"C"
-010	7.20 [.283]	13.80 [.543]	15.25 [.600]
-011	8.00 [.315]	14.60 [.574]	16.05 [.632]
-013	9.60 [.378]	16.20 [.638]	17.65 [.695]
-020	15.20 [.598]	21.80 [.858]	23.25 [.915]
-025	19.20 [.756]	25.80 [1.016]	27.25 [1.073]
-030	23.20 [.913]	29.80 [1.173]	31.25 [1.230]
-37	28.80 [1.134]	35.40 [1.394]	36.85 [1.451]
-040	31.20 [1.228]	37.80 [1.488]	39.25 [1.545]
-049	38.40 [1.512]	45.00 [1.772]	46.45 [1.829]
-050	39.20 [1.543]	45.80 [1.803]	47.25 [1.860]
**-053	41.60 [1.638]	48.20 [1.898]	49.65 [1.955]
-060	47.20 [1.858]	53.80 [2.118]	55.25 [2.175]
-070	55.20 [2.173]	61.80 [2.433]	63.25 [2.490]
-075	59.20 [2.331]	65.80 [2.591]	67.25 [2.648]

** NOT RELEASED FOR PRODUCTION

