

Is Now Part of




ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at <u>www.onsemi.com</u>

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (_), the underscore (_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at www.onsemi.com. Please email any questions regarding the system integration to Fairchild_questions@onsemi.com.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or unavteries, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out or i, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor and is officers, employees, uniotificated use, even if such claim any manner.

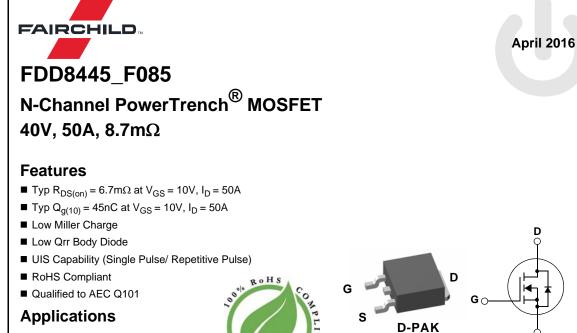

- Automotive Engine Control
- Powertrain Management
- Solenoid and Motor Drivers
- Electronic Transmission
- Distributed Power Architecture and VRMs
- Primary Switch for 12V Systems

For current package drawing, please refer to the Fairchild website at http://www.fairchildsemi.com/package-drawings/TO/ TO252A03.pdf.

(TO-252)

MOSFET Maximum Ratings T_A = 25°C unless otherwise noted

Symbol	Parameter		Ratings	Units
V _{DSS}	Drain to Source Voltage		40	V
V _{GS}	Gate to Source Voltage		±20	V
I _D	Drain Current Continuous (V _{GS} = 10V)		50	^
	Pulsed		Figure 4	Α
E _{AS}	Single Pulse Avalanche Energy (No	ote 1)	144	mJ
P _D	Power Dissipation		79	W
	Derate above 25°C		0.53	W/ºC
T _J , T _{STG}	Operating and Storage Temperature		-55 to +175	°C
$R_{\theta JC}$	Thermal Resistance Junction to Case		1.9	°C/W
$R_{\theta JA}$	Thermal Resistance Junction to Ambient, 1in ² copper pad area		52	°C/W

Package Marking and Ordering Information

Device Marking	Device	Package	Reel Size	Tape Width	Quantity
FDD8445	FDD8445_F085	TO-252AA	13"	12mm	2500 units

Notes:

1: Starting $T_J = 25^{\circ}$ C, L = 0.18mH, I_{AS} = 40A 2: A suffix as "...F085P" has been temporarily introduced in order to manage a double source strategy as Fairchild has officially announced in Aug 2014.

Symbol	Parameter	Test Conditions	Min	Тур	Max	Units
Off Cha	racteristics					
B _{VDSS}	Drain to Source Breakdown Voltage	$I_D = 250 \mu A, V_{GS} = 0 V$	40	-	-	V
	Zero Gate Voltage Drain Current	V _{DS} = 32V,	-	-	1	μA
IDSS	Zero Gale voltage Drain Current	$V_{GS} = 0V T_A = 150^{\circ}C$	-	-	250	
I _{GSS}	Gate to Source Leakage Current	$V_{GS} = \pm 20V$	-	-	±100	nA
V _{GS(th)}	Gate to Source Threshold Voltage	$V_{GS} = V_{DS}, I_D = 250 \mu A$ $I_D = 50A, V_{GS} = 10V$	2	2.8 6.7	4 8.7	V
On Cha	racteristics					
r _{DS(on)}	Drain to Source On Resistance	$I_D = 50A, V_{GS} = 10V$ $T_1 = 175^{\circ}C$	-	12.5	16.3	mΩ
		J				
Dynami C _{iss}	c Characteristics		-	3040	4050	pF
•			-	3040 295	4050 390	pF pF
C _{iss}	Input Capacitance		-			
C _{iss} C _{oss} C _{rss}	Input Capacitance Output Capacitance		- - - -	295	390	pF
C _{iss} C _{oss}	Input Capacitance Output Capacitance Reverse Transfer Capacitance		- - - -	295 178	390	pF pF
C _{iss} C _{oss} C _{rss} R _G	Input Capacitance Output Capacitance Reverse Transfer Capacitance Gate Resistance	$V_{DS} = 25V, V_{GS} = 0V,$ f = 1MHz f = 1MHz	- - - - -	295 178 1.7	390 270	pF pF Ω

Switching Characteristics

Gate to Drain "Miller" Charge

Q_{gd}

t _{on}	Turn-On Time		-	-	138	ns
t _{d(on)}	Turn-On Delay Time		-	10	-	ns
t _r	Rise Time	$V_{DD} = 20V, I_D = 50A$ $V_{GS} = 10V, R_{GS} = 2\Omega$	-	82	-	ns
t _{d(off)}	Turn-Off Delay Time	$V_{GS} = 100, R_{GS} = 202$	-	26	-	ns
t _f	Fall Time		-	9.6	-	ns
t _{off}	Turn-Off Time		-	-	53	ns

-

10.5

-


nC


Drain-Source Diode Characteristics

V _{SD}	Source to Drain Diode Voltage	I _{SD} = 50A	-	-	1.25	V
		I _{SD} = 25A	-	-	1.0	
t _{rr}	Reverse Recovery Time	$I_{SD} = 50A$, $dI_{SD}/dt = 100A/\mu s$	-	-	39	ns
Q _{rr}	Reverse Recovery Charge		-	-	38	nC


FDD8445_F085 N-Channel PowerTrench[®] MOSFET

٦

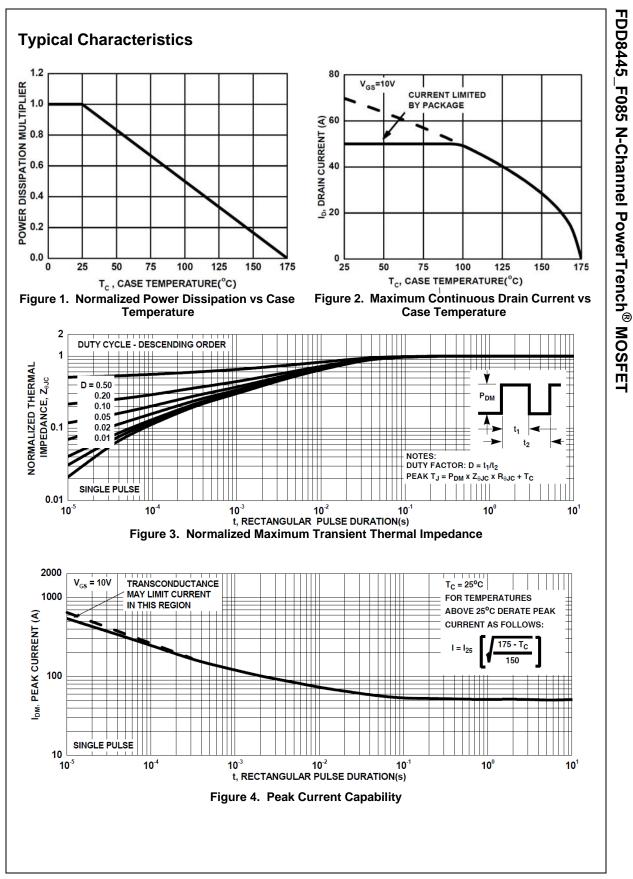

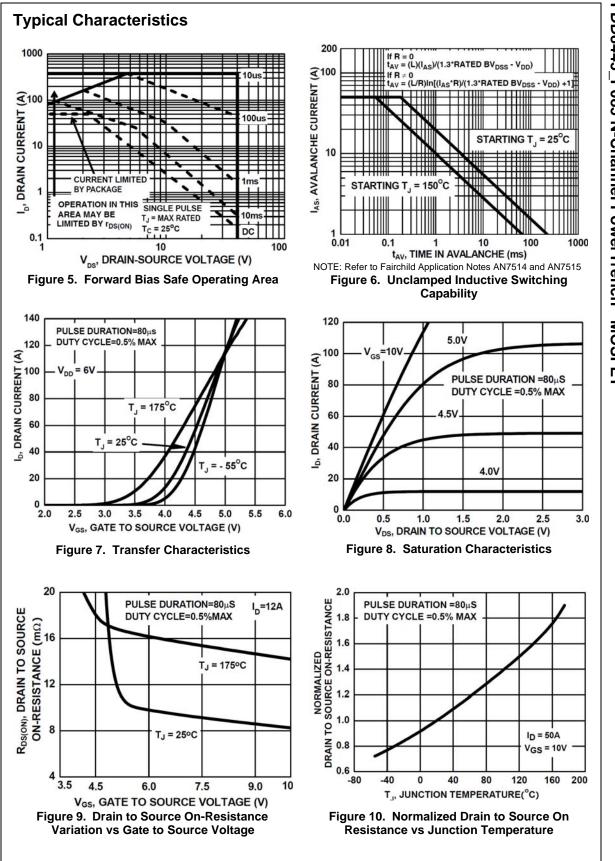

FDD8445_F085 N-Channel PowerTrench[®] MOSFET

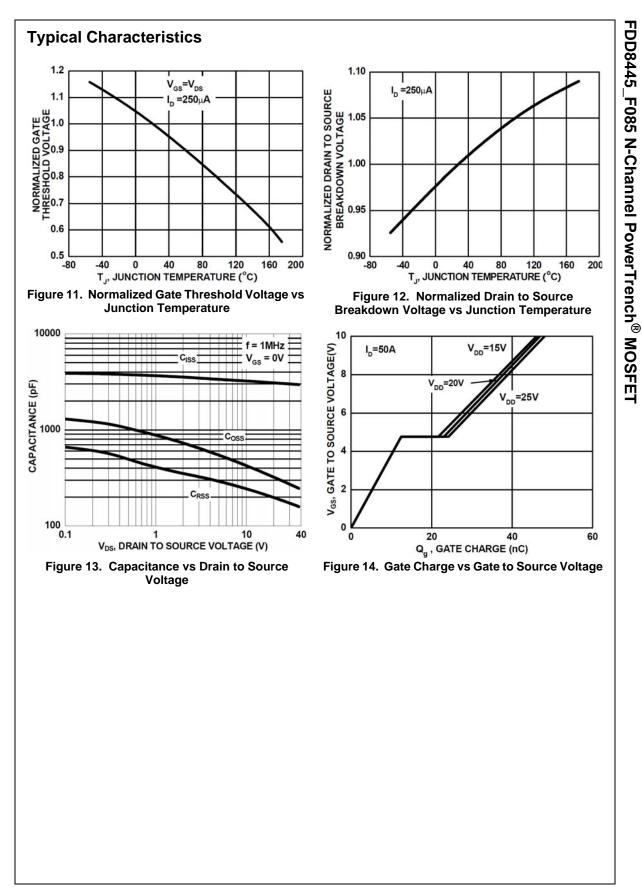



ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor has against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death ass

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81-3-5817-1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

© Semiconductor Components Industries, LLC