

2-W STEREO AUDIO POWER AMPLIFIER WITH DirectPath™ STEREO HEADPHONE DRIVE AND REGULATOR

DESCRIPTION


FEATURES

- Microsoft™ Windows Vista™ Compliant
- Fully Differential Architecture and High PSRR Provide Excellent RF Rectification Immunity
- 2.1-W, 1% THD+N Into 4-Ω Speakers and 85-mW, 1% THD+N Into 16-Ω Headphones From 5-V Supply
- DirectPath[™] Headphone Amplifier Eliminates
 Output Capacitors (1)
- Internal 4-Step Speaker Gain Control: 10, 12, 15.6, 21.6 dB and Fixed -1.5-V/V Headphone
- 3.3-V Low Dropout Regulator for CODEC
- Independent Shutdown Controls for Speaker, Headphone Amplifier, and Low Dropout Regulator (LDO)
- Output Short-Circuit and Thermal Protection

APPLICATIONS

- Notebook Computers
- Portable DVD

SIMPLIFIED APPLICATION CIRCUIT



The TPA6045A4C is a stereo audio power amplifier and DirectPath™ headphone amplifier in a thermally enhanced, space-saving, 32-pin QFN package. The speaker amplifier is capable of driving 2.1 W per channel continuously into 4-Ω loads at 5 V. The headphone amplifier achieves a minimum of 85 mW at 1% THD+N from a 5-V supply. A built-in internal 4-step gain control for the speaker amplifier and a fixed −1.5 V/V gain for the headphone amplifier minimizes external components needed.

Independent shutdown control and dedicated inputs for the speaker and headphone allow the TPA6045A4C to simultaneously drive both headphones and internal speakers. Differential inputs to the speaker amplifiers offer superior power-supply and common-mode noise rejection.

	Speaker Enable	LDO (V)	Gain (dB)
TPA6040A4	Active Low	4.75	6, 10, 15.6, 21.6
TPA6041A4	Active Low	3.3	10, 12, 15.6, 21.6
TPA6043A4	Active Low	3.3	6, 10, 15.6, 21.6
TPA6045A4C	Active High	3.3	10, 12, 15.6, 21.6
TPA6047A4	Active High	4.75	10, 12, 15.6, 21.6

(1) US Patent Number 5289137

 \triangle

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.


DirectPath, PowerPAD are trademarks of Texas Instruments. Microsoft, Windows Vista are trademarks of Microsoft Corporation. SLOS614-OCTOBER 2008 www.ti.com





These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

Functional Block Diagram

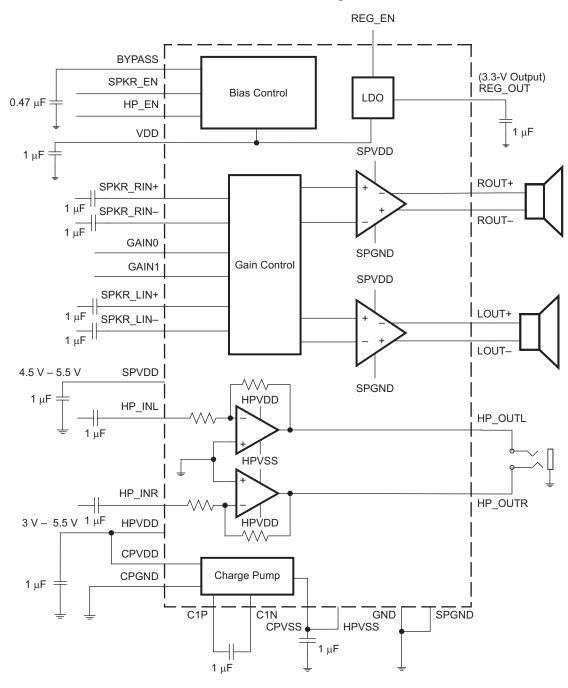

AVAILABLE PACKAGE OPTIONS

T _A	PACKAGED DEVICE ⁽¹⁾⁽²⁾ 32-Pin QFN (RHB)
-40°C to 85°C	TPA6045A4CRHB

- (1) The RHB package is available taped and reeled. To order a taped and reeled part, add the suffix R to the part number (e.g., TPA6045A4CRHBR).
- (2) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI website at www.ti.com.

TPA6045A4CRHB (TOP VIEW) GAIN0 SGND GAIN1 REG REG VDD 31 [_] 29 [] 28 [] 27 () 26 30 25 24(SPKR RIN-**BYPASS** SPKR RIN+ SPKR_EN 23(SPKR_LIN+ HP_EN 22(SPKR LIN-**SPGND** Thermal Pad SPGND **ROUT+** 20(LOUT+ _)6 ROUT-19(<u></u> LOUT-SPVDD 18(17 16 **SPVDD HPVDD** C1P CPVSS CIN **HPVSS** OUTR CPVDD OUTL CPGND

TERMINAL FUNCTIONS

TERMIN	ERMINAL LOOP		DECORPTION
NAME	NO.	I/O/P	DESCRIPTION
SPKR_RIN-	1	I	Right-channel negative differential audio input for speaker amplifier
SPKR_RIN+	2	I	Right-channel positive differential audio input for speaker amplifier
SPKR_LIN+	3	I	Left-channel positive differential audio input for speaker amplifier
SPKR_LIN-	4	I	Left-channel negative differential audio input for speaker amplifier
SPGND	5, 21	Р	Speaker power ground
LOUT+	6	0	Left-channel positive audio output
LOUT-	7	0	Left-channel negative audio output
SPVDD	8, 18	Р	Supply voltage terminal for speaker amplifier
CPVDD	9	Р	Charge pump positive supply, connect to HPVDD via star connection
C1P	10	I/O	Charge pump flying capacitor positive terminal
CPGND	11	Р	Charge pump ground
C1N	12	I/O	Charge pump flying capacitor negative terminal
CPVSS	13	Р	Charge pump output (negative supply for headphone amplifier), connect to HPVSS
HPVSS	14	Р	Headphone amplifier negative supply, connect to CPVSS
HP_OUTR	15	0	Right-channel capacitor-free headphone output
HP_OUTL	16	0	Left-channel capacitor-free headphone output
HPVDD	17	Р	Headphone amplifier supply voltage, connect to CPVDD

SLOS614-OCTOBER 2008





TERMINAL FUNCTIONS (continued)

TERMIN	TERMINAL		DECORPORTOR	
NAME	NO.	I/O/P	DESCRIPTION	
ROUT-	19	0	Right-channel negative audio output	
ROUT+	20	0	Right-channel positive audio output	
HP_EN	22	I	adphone channel enable logic input; active high enable. HIGH=ENABLE.	
SPKR_EN	23	I	eaker channel enable logic input; active high enable. HIGH=ENABLE.	
BYPASS	24	Р	mmon-mode bias voltage for speaker preamplifiers	
REG_EN	25	I	nable pin for turning on/off LDO. HIGH=ENABLE	
HP_INR	26	I	Headphone right-channel audio input	
HP_INL	27	I	Headphone left-channel audio input	
SGND	28	Р	Signal ground, connect to CPGND and SPGND	
REG_OUT	29	0	Regulated 3.3-V output	
VDD	30	Р	Positive power supply	
GAIN0	31	I	Bit 0, MSB, of gain select bits	
GAIN1	32	I	Bit 1, LSB, of gain select bits	
Thermal Pad	Die Pad	Р	Solder the thermal pad on the bottom of the QFN package to the GND plane of the PCB. It is required for mechanical stability and will enhance thermal performance.	

ABSOLUTE MAXIMUM RATINGS

over operating free-air temperature range (unless otherwise noted)(1)

			VALUE	UNIT
	Supply voltage	HPVDD, VDD, SPVDD, CPVDD	-0.3 to 6	V
	Input voltage	SPKR_LIN+, SPKR_LIN-, SPKR_RIN+, SPKR_RIN-, HP_EN,GAIN0, GAIN1, SPK_EN, REG_EN	-0.3 to 6.3	
VI		HP_INL, HP_INR HP Enabled	-3.5 to 3.5	V
		HP_INL, HP_INR HP not Enabled	-0.3 to 3.5	
	Continuous total power dissipation		See Dissipation Rating Table	
T _A	Operating free-air temper	ature range	-40 to 85	°C
T_{J}	Operating junction tempe	rature range	-40 to 150	°C
T _{stg}	Storage temperature rang	ge	-65 to 150	°C
	Electrostatic discharge	HBM for HP_OUTL and HP_OUTR	8	kV
	Electrostatic discharge,	CDM	500	V
	all other pins	НВМ	2	kV

⁽¹⁾ Stresses beyond those listed under absolute maximum ratings may cause permanent damage to the device. These are stress ratings only, and functional operations of the device at these or any other conditions beyond those indicated under recommended operating conditions is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

DISSIPATION RATINGS

PACKAGE ⁽¹⁾	T _A ≤ 25°C	DERATING FACTOR	T _A = 70°C	T _A = 85°C
RHB	5.06 W	40 mW/°C	4.04 W	3.23 W

⁽¹⁾ The PowerPAD™ must be soldered to a thermal land on the printed-circuit board. Refer to the Texas Instruments document, PowerPAD™ Thermally Enhanced Package application report (literature number SLMA002) for more information regarding the PowerPAD™ package.

RECOMMENDED OPERATING CONDITIONS

		MIN	MAX	UNIT
Supply voltage	VDD, SPVDD	4.5	5.5	V
Supply voltage	HPVDD, CPVDD	3	5.5	V

Submit Documentation Feedback

RECOMMENDED OPERATING CONDITIONS (continued)

			MIN	MAX	UNIT
V_{IH}	High-level input voltage	SPKR_EN, HP_EN, GAIN0, GAIN1, REG_EN	2		V
V_{IL}	Low-level input voltage	SPKR_EN, HP_EN, GAIN0, GAIN1, REG_EN		0.8	V
T _A	Operating free-air temperature		-40	85	°C

GENERAL DC ELECTRICAL CHARACTERISTICS

T_A = 25°C, VDD = SPVDD = HPVDD = CPVDD = 5 V (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
I _{IH}	High-level input current	SPKR_EN, HP_EN, GAINO, GAIN1, REG_EN = VDD		0.02	1	μΑ
I _{IL}	Low-level input current	SPKR_EN, HP_EN, GAINO, GAIN1, REG_EN = 0 V		0.02	1	μΑ
I _{DD(Speaker)}	Supply current, speaker amplifier ONLY enabled	SPKR_EN = 2 V, HP_EN = REG_EN = 0 V		5	12	mA
I _{DD(HP)}	Supply current, headphone amplifier ONLY enabled	HP_EN = 2 V, SPKR_EN = REG_EN = 0 V		7.5	14	mA
I _{DD(REG)}	Supply current, regulator ONLY enabled	REG_EN = 2 V, SPKR_EN = HP_EN = 0 V		0.65	1	mA
I _{DD(SD)}	Supply current, shutdown mode	SPKR_EN = HP_EN = REG_EN = 0 V		2.5	5	μΑ

SPEAKER AMPLIFIER DC CHARACTERISTICS

 $T_A = 25$ °C, VDD = SPVDD = 5 V, $R_L = 4 \Omega$, Gain = 10 dB (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
V ₀₀	Output offset voltage (measured differentially)	Inputs AC-coupled to GND, Gain = 10 dB		0.5	10	mV
PSRR	Power supply rejection ratio	VDD = SPVDD = 4.5 V to 5.5 V	-60	-74		dB

SPEAKER AMPLIFIER AC CHARACTERISTICS

 $T_A = 25$ °C, VDD = SPVDD = 5 V, $R_L = 4 \Omega$, Gain = 10 dB (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT	
		THD+N = 1%, f = 1 kHz, R_L = 8 Ω		1.3			
Б	Output a sure	THD+N = 10%, f = 1 kHz, $R_L = 8 \Omega$		1.6		W	
Po	Output power	THD+N = 1%, f = 1 kHz, $R_L = 4 \Omega$		2.1			
		THD+N = 10%, f = 1 kHz, $R_L = 4 \Omega$		2.6			
THD+N	Total harmonia distortion plus poiss	$P_O = 1$ W, $R_L = 8$ Ω , $f = 20$ Hz to 20 kHz		0.06%			
I HD+IN	Total harmonic distortion plus noise	$P_{O} = 1 \text{ W}, R_{L} = 4 \Omega, f = 20 \text{ Hz to } 20 \text{ kHz}$		0.1%			
kSVR	Supply ripple rejection ratio	f = 1 kHz, CBYPASS = 0.47 μF, R_L = 8 Ω V_{RIPPLE} = 200 m V_{PP}		-53		dB	
SNR	Signal-to-noise rejection ratio	Maximum output at THD+N <1%, f = 1 kHz, Gain = 10 dB		90		dB	
	Consider (Loft Diabt Diabt Loft)	f = 1 kHz, P _o = 1 W, Gain = 10 dB		-110		dB	
	Crosstalk (Left-Right; Right-Left)	f = 10 kHz, P _o = 1 W, Gain = 10 dB		-100		dB	
Vn	Noise output voltage	CBYPASS = 0.47 μ F, f = 20 Hz to 20 kHz, Gain = 10 dB, No weighting		21		μVrms	
Z _I	Input Impedance	Gain = 21.6 dB	15	20		kΩ	
		GAIN0, GAIN1 = 0.8 V	9.4	10	10.6		
0	Cain	GAIN0 = 0.8 V; GAIN1 = 2 V	11.4	12	12.6	٩D	
G	Gain	GAIN0 = 2 V, GAIN1 = 0.8 V	15	15.6	16.2	dB	
		GAIN0, GAIN1 = 2 V	21	21.6	22.2		
	Gain Matching	Channel-to Channel		0.01		dB	

Copyright © 2008, Texas Instruments Incorporated

SLOS614-OCTOBER 2008 www.ti.com

SPEAKER AMPLIFIER AC CHARACTERISTICS (continued)

 $T_A = 25$ °C, VDD = SPVDD = 5 V, $R_L = 4 \Omega$, Gain = 10 dB (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Start-up time from shutdown	CBYPASS = $0.47 \mu F$		25		ms

HEADPHONE AMPLIFIER DC ELECTRICAL CHARACTERISTICS

 $T_A = 25$ °C, HPVDD = CPVDD = VDD = 5 V, $R_L = 16 \Omega$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
Vos	Output offset voltage	Inputs grounded		1	3	mV
PSRR	Power supply rejection ratio	HPVDD = 4.5 V to 5.5 V	-75	-100		dB

HEADPHONE AMPLIFIER AC CHARACTERISTICS

 $T_A = 25$ °C, HPVDD = 5 V, $R_L = 16 \Omega$ (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
1	Output navian (autputa in phase)	THD+N = 10%, $R_L = 16 \Omega$, $f = 1 \text{ kHz}$		200		\^/
Po	Output power (outputs in phase)	THD+N = 10%, $R_L = 32 \Omega$, $f = 1 \text{ kHz}$		100		mW
TUDAN	Total harmania distantian alva naisa	P_{O} = 85 mW, f = 20 Hz to 20 kHz, R_{L} = 16 Ω		0.03%		
THD+N	Total harmonic distortion plus noise	P_{O} = 50 mW, f = 20 Hz to 20 kHz, R_{L} = 32 Ω		0.04%		
	Dynamic Range with Signal Present	A-Weighted, f = 20 Hz to 20 kHz		-100		dB FS
kSVR	Supply ripple rejection ratio	f = 1 kHz, 200-mV _{PP} ripple		-60		dB
	Crosstalk	P _o = 35 mW, f = 20 Hz to 20 kHz		-80		dB
SNR	Signal-to-noise ratio	Maximum output at THD+N 1%, f = 1 kHz		95		dB
V _n	Noise output voltage	f = 20 Hz to 20 kHz, No weighting		20		μVrms
Z _I	Input Impedance		15	20		kΩ
Gain	Closed-loop voltage gain	$R_L = 16 \Omega$	-1.45	-1.5	-1.55	V/V
	Start-up time from shutdown			7.5		ms

LDO CHARACTERISTICS

 $T_A = 25$ °C, VDD = 5 V (unless otherwise noted)


	PARAMETER	TEST CONDITI	ONS	MIN	TYP	MAX	UNIT
VI	Input voltage	V_{DD}		4.5		5.5	V
Io	Continuous output current			120			mA
Vo	Output voltage	0 < I _O < 120 mA; 4.9 V < Vin < 5	3.2	3.3	3.4	V	
	Line regulation	I _L = 5 mA; 4.9 V < Vin < 5.5 V	I _L = 5 mA; 4.9 V < Vin < 5.5 V			10	mV
	Load regulation	I _L = 0 – 120 mA, Vin = 5 V			0.13	0.23	mV/ mA
	Power supply ripple rejection	V _{DD} = 4.9 V, I _L = 10 mA	f = 100 Hz		-46		dB


Submit Documentation Feedback





TYPICAL CHARACTERISTICS

Default graph conditions: $V_{CC} = 5 \text{ V}$, Freq = 1 kHz, AES17 Filter.

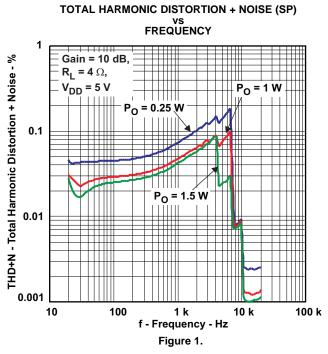

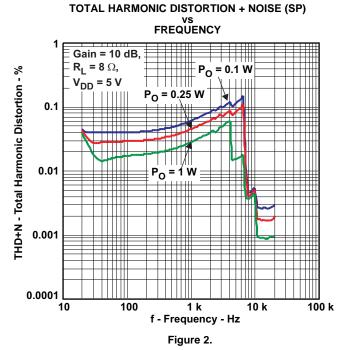

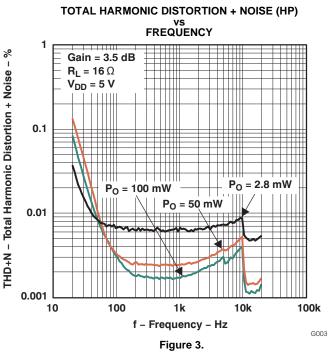

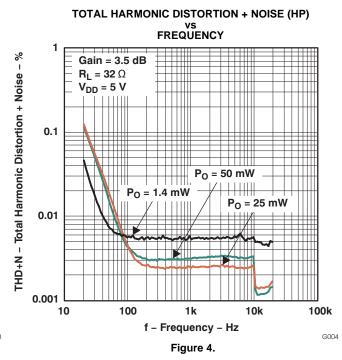





www.ti.com

TYPICAL CHARACTERISTICS (continued)







TOTAL HARMONIC DISTORTION + NOISE (SP)



TOTAL HARMONIC DISTORTION + NOISE (HP)




TOTAL HARMONIC DISTORTION + NOISE (HP)
vs
OUTPUT POWER






TYPICAL CHARACTERISTICS (continued)

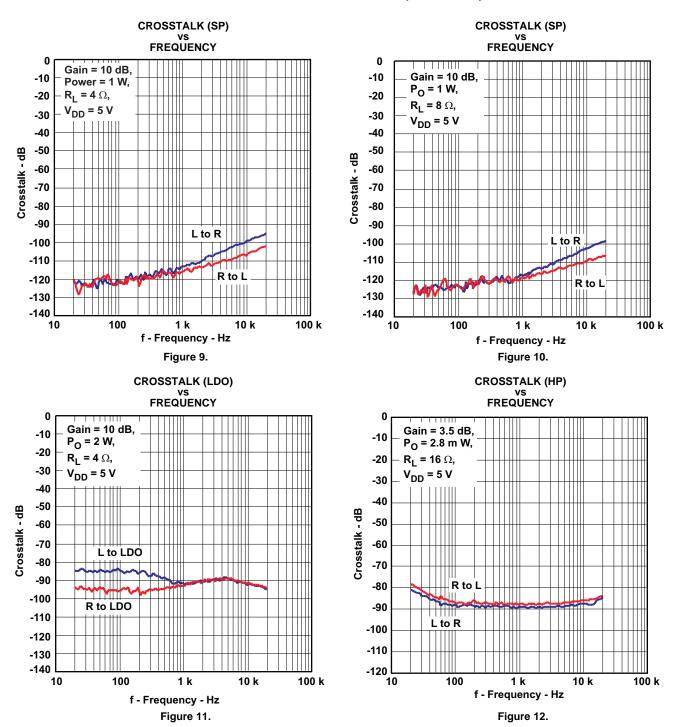








TYPICAL CHARACTERISTICS (continued)






CROSSTALK (HP)






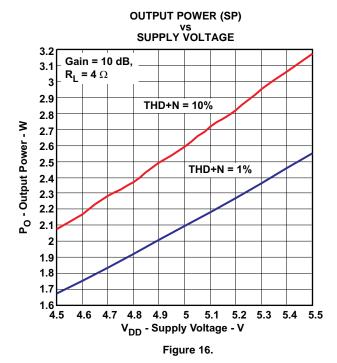




www.ti.com


TVDICAL CHADACTEDICTICS (continued)

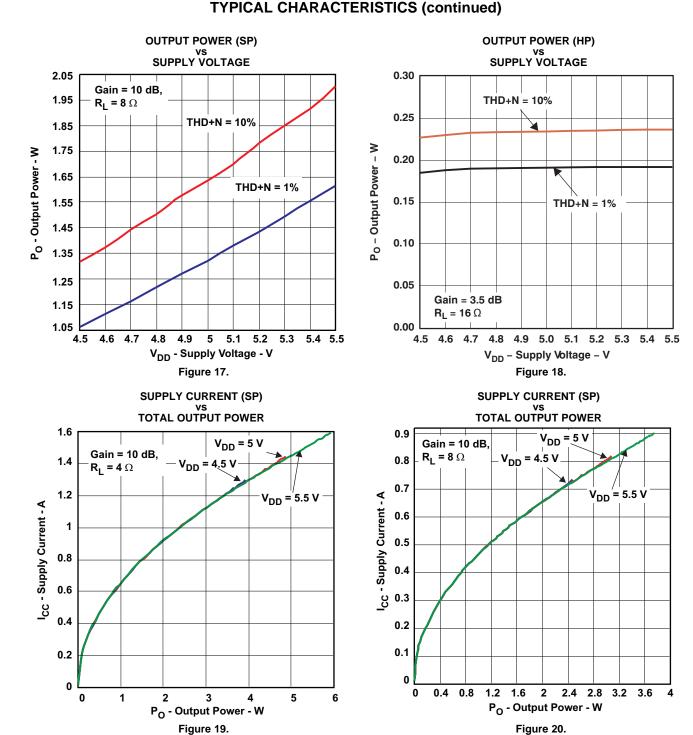





TYPICAL CHARACTERISTICS (continued)

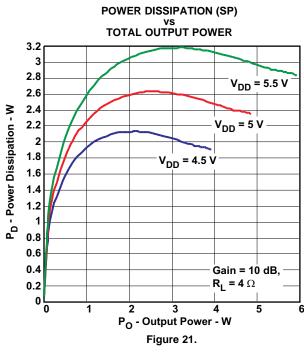

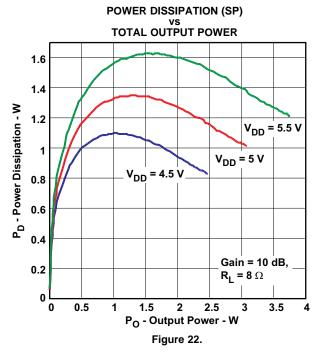


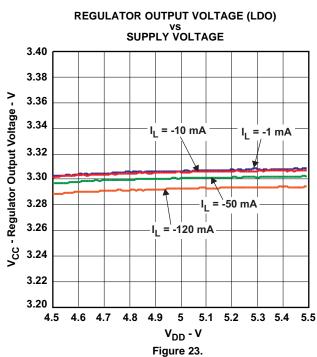

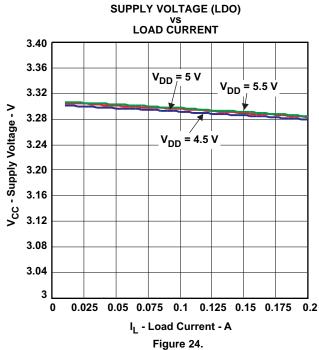





TYPICAL CHARACTERISTICS (continued)

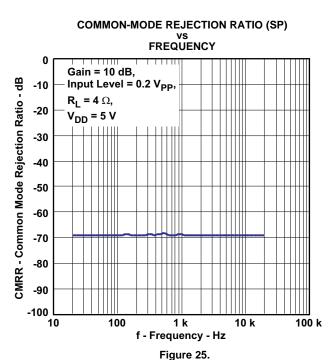


POWER SUPPLY REJECTION RATIO (LDO) vs FREQUENCY



COMMON-MODE REJECTION RATIO (SP)





POWER SUPPLY REJECTION RATIO (SP)





TYPICAL CHARACTERISTICS (continued)

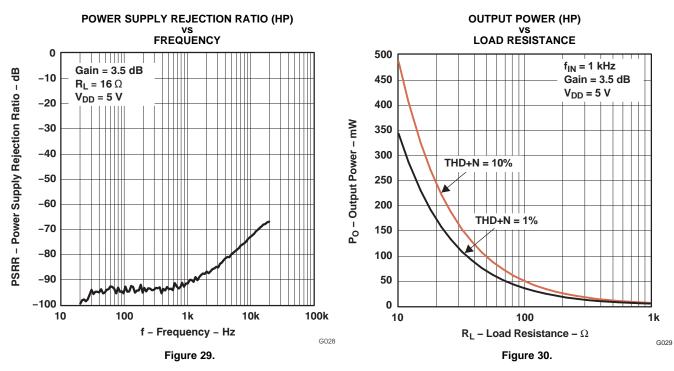





TYPICAL CHARACTERISTICS (continued)

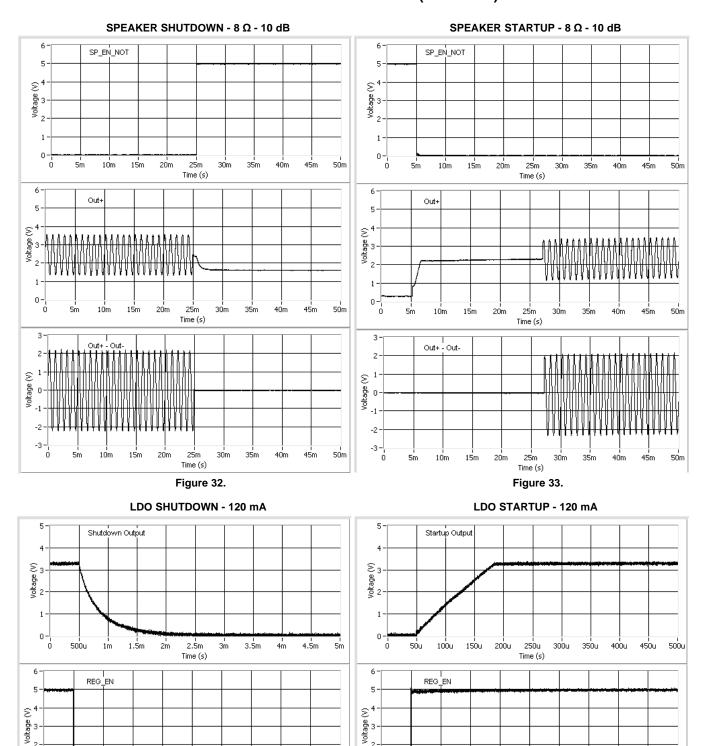


Figure 34. Figure 35.

100u

150u

200u

250u

Time (s)

1.5m

2.5m

Time (s)

3.5m

4.5m

0-1-0

500u

300u

350u

400u

450u

500u



TYPICAL CHARACTERISTICS (continued)

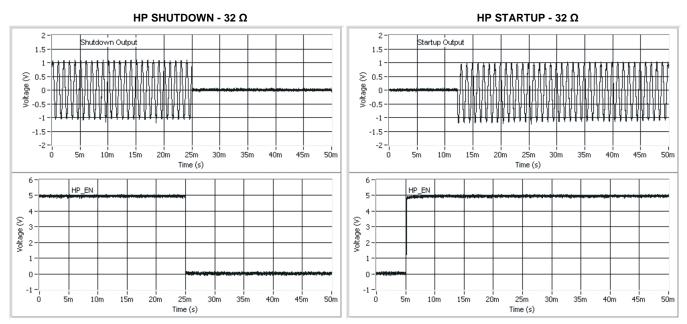


Figure 36. Figure 37.

APPLICATION INFORMATION

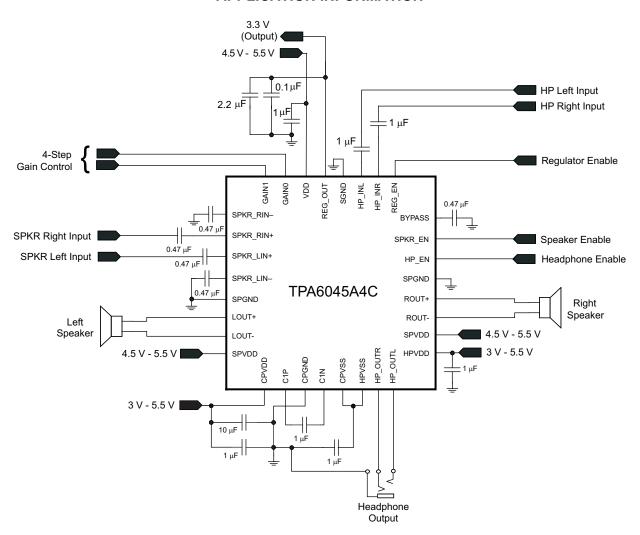


Figure 38. Single-Ended Input Application Circuit

SLOS614-OCTOBER 2008 www.ti.com



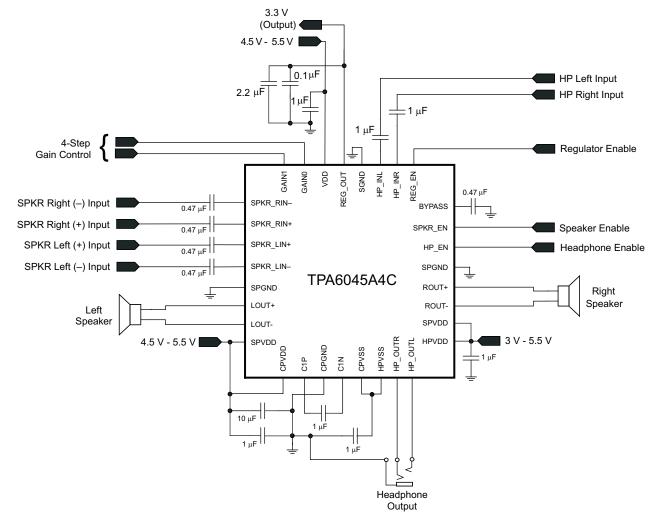


Figure 39. Differential Input Application Circuit

Power Enable Modes

The TPA6045A4C allows disable of any or all of the main circuit blocks when not in use in order to reduce operating power to an absolute minimum. The SPKR_EN control can be used to disable the speaker amplifier while the HP_EN can be used separately to turn off the headphone amplifier. The LDO also has an independent power control, REG_EN. With all circuit blocks disabled, the supply current in shutdown mode is only 5 μA. See the General DC Electrical Characteristics for operating currents with each circuit block operating independently.

Speaker Amplifier Description

The speaker amplifier is capable of driving 2.1 W/ch of continuous RMS power into a $4-\Omega$ load at 5 V. An internal 4-step control allows variation of the gain from 10 dB to 21.6 dB.

Fully Differential Amplifier

The TPA6045A4C speaker amplifier is a fully differential amplifier with differential inputs and outputs. The fully differential architecture consist of a differential amplifier and a common mode amplifier. The differential amplifier ensures that the amplifier outputs a differential voltage that is equal to the differential input times the gain. The common-mode voltage at the output is biased around $V_{DD}/2$ regardless of the common-mode voltage at the input.

Submit Documentation Feedback

One of the primary advantages of the fully differential amplifier is improved RF immunity. GSM handsets save power by turning on and off the RF transmitter at a rate of 217 Hz. The transmitted signal is picked up on input and output traces. The fully differential amplifier cancels the signal and others of this type much better than typical audio amplifiers.

Gain Setting via GAIN0 and GAIN1 Inputs

The gain of the TPA6045A4C is set by two terminals, GAIN0 and GAIN1. The gains listed in Table 1 are realized by changing the taps on the input resistors and feedback resistors inside the amplifier. This causes the input impedance (Z_i) to vary as a function of the gain setting.

Gain	Setting
------	---------

GAIN1	GAIN0	AMPLIFIER GAIN (dB)	INPUT IMPEDANCE (kΩ)
		TYPICAL	TYPICAL
0	0	10	78
0	1	12	65
1	0	15.6	46
1	1	21.6	20

Input Capacitor, C_I

The input capacitor allows the amplifier to bias the input signal to the proper dc level for proper operation. In this case, the input capacitor, C_l , and the input impedance of the amplifier, R_l , form a high-pass filter with the corner frequency determined in Equation 1. Figure 40 shows how the input capacitor and the input resistor within the amplifier interact.




Figure 40. Input Resistor and Input Capacitor

$$f_{c(highpass)} = \frac{1}{2\pi R_{I}C_{I}}$$
 (1)

The value of C_I is important to consider as it directly affects the low-frequency, or bass, performance of the circuit. Furthermore, the input impedance changes with a change in volume. The higher the volume, the lower the input impedance is. To determine the appropriate capacitor value, reconfigure Equation 1 into Equation 2. The value of the input resistor, R_I , can be determined from Equation 2.

$$C_{\parallel} = \frac{1}{2\pi R_{\parallel} f_{c}} \tag{2}$$

Low-leakage tantalum or ceramic capacitors are recommended. When polarized capacitors are used, the positive side of the capacitor should face the amplifier input in most applications as the dc level there is held at VCC/2, which is likely higher than the source dc level. Note that it is important to confirm the capacitor polarity in each specific application. Recommended capacitor values are between 0.1 μ F and 1 μ F.

Copyright © 2008, Texas Instruments Incorporated

SLOS614-OCTOBER 2008 www.ti.com



Windows Vista™ Premium Mobile Mode Specifications

Device Type	Requirement	Windows Premium Mobile Vista Specifications	TPA6045A4C Typical Performance		
	THD+N	≤ -65 dB FS [20 Hz, 20 kHz]	-88 dB FS[20 Hz, 20 kHz]		
Analog Speaker Line Jack $(R_L = 10 \text{ k}\Omega, \text{ FS} = 0.707 \text{ Vrms})$	Dynamic Range with Signal Present	≤ –80 dB FS A-Weight	–88 dB FS A-Weight		
viiiio)	Line Output Crosstalk	≤ -60 dB [20 Hz, 20 kHz]	–105 dB [20 Hz, 20 kHz]		
	THD+N	≤ -45 dB FS [20 Hz, 20 kHz]	-88 dB FS [20 Hz, 20 kHz]		
Analog Headphone Out Jack $(R_L = 32\Omega, FS = 0.300)$ Vrms)	Dynamic Range with Signal Present	≤ -80 dB FS A-Weight	–89 dB FS A-Weight		
5)	Headphone Output Crosstalk	≤ -60 dB [20 Hz, 20 kHz]	–100 dB [20 Hz, 20 kHz]		

Bridge-Tied Load Versus Single-Ended Mode

Figure 41 shows a Class-AB audio power amplifier (APA) in a bridge-tied-load (BTL) configuration. The TPA6045A4C speaker amplifier consists of two Class-AB differential amplifiers per channel driving the positive and negative terminals of the load. Specifically, differential drive means that as one side of the amplifier (the positive terminal, for example) is slewing up, the other side is slewing down, and vice versa. This doubles the voltage swing across the load as opposed to a ground-referenced load, or a single-ended load. Power is proportional to the square of the voltage. Plugging 2x VO(PP) into the power equation yields 4X the output power from the same supply rail and load impedance as would have been obtained with a ground-referenced load (see Equation 3).

$$V_{(RMS)} = \frac{V_{O(PP)}}{2\sqrt{2}}$$

$$Power = \frac{V_{(RMS)}^{2}}{R_{L}}$$

V_{DD}




Figure 41. Differential Output Configuration

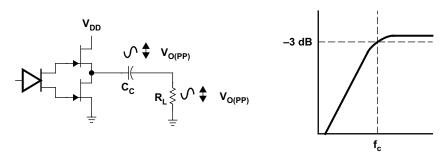


Figure 42. Single-Ended Configuration and Frequency Response

20



Bridge-tying the outputs in a typical computer audio, LCD TV, or multimedia LCD monitor application drastically increases output power. For example, if an amplifier in a single-ended configuration was capable of outputting a maximum of 250 mW for a given load with a supply voltage of 12 V, then that same amplifier would be able to output 1 W of power in a BTL configuration with the same supply voltage and load. In addition to the increase in output power, the BTL configuration does not suffer from the same low-frequency issues that plague the single-ended configuration. In a BTL configuration, there is no need for an output capacitor to block dc, so no unwanted filtering occurs. In addition, the BTL configuration saves money and space, as the dc-blocking capacitors needed for single-ended operation are large and expensive. For example, with an $8-\Omega$ load in SE operation, the user needs a $1000-\mu F$ capacitor to obtain a cutoff frequency below 20 Hz. This capacitor is expensive and large.

Headphone Amplifier Description

The headphone amplifier has a fixed gain of −1.5 V/V. It uses single-ended (SE) inputs. The DirectPathTM amplifier architecture operates from a single supply but makes use of an internal charge pump to provide a negative voltage rail. Combining the user-provided positive rail and the negative rail generated by the IC, the device operates in what is effectively a split supply mode. The output voltages are now centered at zero volts with the capability to swing to the positive rail or negative rail. The DirectPathTM amplifier requires no output dc blocking capacitors and does not place any voltage on the sleeve. The block diagram and waveform of Figure 43 illustrate the ground-referenced headphone architecture. This is the architecture of the TPA6045A4C.

Single-supply headphone amplifiers typically require dc-blocking capacitors. The capacitors are required because most headphone amplifiers have a dc bias on the outputs pin. If the dc bias is not removed, the output signal is severely clipped, and large amounts of dc current rush through the headphones, potentially damaging them. The left-side drawing in Figure 43 illustrates the conventional headphone amplifier connection to the headphone jack and output signal.

DC blocking capacitors are often large in value. The headphone speakers (typical resistive values of 16 Ω or 32 Ω) combine with the dc blocking capacitors to form a high-pass filter. Equation 4 shows the relationship between the load impedance (R_1), the capacitor (C_0), and the cutoff frequency (f_0).

$$f_{c} = \frac{1}{2\pi R_{L} C_{O}} \tag{4}$$

Co can be determined using Equation 5, where the load impedance and the cutoff frequency are known.

$$C_{O} = \frac{1}{2\pi R_{L} f_{c}} \tag{5}$$

If f_c is low, the capacitor must then have a large value because the load resistance is small. Large capacitance values require large package sizes. Large package sizes consume PCB area, stand high above the PCB, increase cost of assembly, and can reduce the fidelity of the audio output signal.

Two different headphone amplifier applications are available that allow for the removal of the output dc blocking capacitors. The capacitor-less amplifier architecture is implemented in the same manner as the conventional amplifier with the exception of the headphone jack shield pin. This amplifier provides a reference voltage, which is connected to the headphone jack shield pin. This is the voltage on which the audio output signals are centered. This voltage reference is half of the amplifier power supply to allow symmetrical swing of the output voltages. Do not connect the shield to any GND reference, or large currents will result. The scenario can happen if, for example, an accessory other than a floating GND headphone is plugged into the headphone connector. See the second block diagram and waveform in Figure 43.



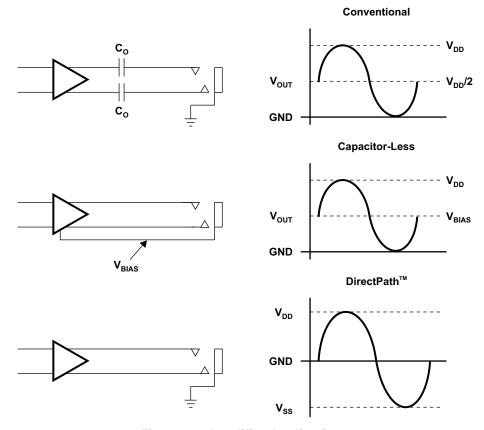


Figure 43. Amplifier Applications

Input-Blocking Capacitors

DC input-blocking capacitors block the dc portion of the audio source and allow the inputs to properly bias. Maximum performance is achieved when the inputs of the TPA6045A4C are properly biased. Performance issues such as pop are optimized with proper input capacitors.

The dc input-blocking capacitors can be removed, provided the inputs are connected differentially and within the input common-mode range of the amplifier, the audio signal does not exceed ±3 V, and pop performance is sufficient.

 C_{IN} is a theoretical capacitor used for mathematical calculations only. Its value is the series combination of the dc input-blocking capacitors, $C_{(DCINPUT-BLOCKING)}$. Use Equation 6 to determine the value of $C_{(DCINPUT-BLOCKING)}$. For example, if C_{IN} is equal to 0.22 μ F, then $C_{(DCINPUT-BLOCKING)}$ is equal to about 0.47 μ F.

$$C_{IN} = \frac{1}{2} C_{(DCINPUT-BLOCKING)}$$
 (6)

The two $C_{(DCINPUT-BLOCKING)}$ capacitors form a high-pass filter with the input impedance of the TPA6045A4C. Use Equation 6 to calculate C_{IN} , then calculate the cutoff frequency using C_{IN} and the differential input impedance of the TPA6045A4C, R_{IN} , using Equation 7. Note that the differential input impedance changes with gain. See Figure 39 for input impedance values. The frequency and/or capacitance can be determined when one of the two values are given.

$$fc_{IN} = \frac{1}{2\pi R_{IN} C_{IN}}$$
 or $C_{IN} = \frac{1}{2\pi fc_{IN} R_{IN}}$ (7)

If a high-pass filter with a -3-dB point of no more than 20 Hz is desired over all gain settings, the minimum impedance would be used in the Equation 7. The minimum input impedance for TPA6045A4C is 20 k Ω . The capacitor value by Equation 7 would be 0.399 μ F. However, this is C_{IN} , and the desired value is for $C_{(DCINPUT-BLOCKING)}$. Multiplying C_{IN} by 2 yields 0.80 μ F, which is close to the standard capacitor value of 1 μ F. Place 1- μ F capacitors at each input terminal of the TPA6045A4C to complete the filter.

Charge Pump Flying Capacitor and CPVSS Capacitor

The charge pump flying capacitor serves to transfer charge during the generation of the negative supply voltage. The CPVSS capacitor must be at least equal to the flying capacitor in order to allow maximum charge transfer. Low ESR capacitors are an ideal selection, and a value of 1 µF is typical.

Decoupling Capacitors

The TPA6045A4C is a DirectPathTM headphone amplifier that requires adequate power supply decoupling to ensure that the noise and total harmonic distortion (THD) are as low as possible. To filter high-frequency transients, spikes, and digital hash on the power line, use good low equivalent-series-resistance (ESR) ceramic capacitors, typically 1 μ F. Find the smallest package possible, and place as close as possible to the device V_{DD} lead. Placing the decoupling capacitors close to the TPA6045A4C is important for the performance of the amplifier. Use a 10 μ F or greater capacitor near the TPA6045A4C to filter lower frequency noise signals; however, the high PSRR of the TPA6045A4C makes the 10- μ F capacitor unnecessary in most applications.

Midrail Bypass Capacitor, CBYPASS

The midrail bypass capacitor, $C_{(BYPASS)}$, has several important functions. During start-up or recovery from shutdown mode, C_{BYPASS} determines the rate at which the amplifier starts up. A 1- μ F capacitor yields a start-up time of approximately 25 ms. C_{BYPASS} also reduces the noise coupled into the output signal by the power supply. This improves the power supply ripple rejection (PSRR) of the amplifier. Ceramic or polyester capacitors with low ESR and values in the range of 0.47 μ F to 1 μ F are recommended.

Low Dropout Regulator (LDO) Description

The TPA6045A4C contains a 3.3-V output low dropout regulator (LDO) capable of providing a maximum of 120 mA with a drop of less than 150 mV from the 5-V supply. This can be used to power an external CODEC. A $10-\mu F$ decoupling capacitor is recommended at the output of the LDO as well as $0.1-\mu F$ capacitor to filter high-frequency noise from the supply line.

Layout Recommendations

Solder the exposed thermal pad (metal pad on the bottom of the part) on the TPA6045A4C QFN package to a pad on the PCB.

It is important to keep the TPA6045A4C external components close to the body of the amplifier to limit noise pickup. One should lay out the differential input leads symmetrical and close together to take advantage of the inherent common mode rejection of the TPA6045A4C. The layout of the TPA6045A4C evaluation module (EVM) is a good example of component placement and the layout files are available at www.ti.com.

Copyright © 2008, Texas Instruments Incorporated



PACKAGE OPTION ADDENDUM

27-Jul-2013

PACKAGING INFORMATION

Orderable Device	Status	Package Type	Package Drawing	Pins	Package Qty	Eco Plan	Lead/Ball Finish	MSL Peak Temp	Op Temp (°C)	Device Marking (4/5)	Samples
TPA6045A4CRHBR	ACTIVE	VQFN	RHB	32	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-3-260C-168 HR	-40 to 85	TPA 6045A4	Samples

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes. **Pb-Free** (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

- (3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.
- (4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.
- (5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

PACKAGE MATERIALS INFORMATION

www.ti.com 2-Feb-2018

TAPE AND REEL INFORMATION





	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPA6045A4CRHBR	VQFN	RHB	32	3000	330.0	12.4	5.3	5.3	1.5	8.0	12.0	Q2
TPA6045A4CRHBR	VQFN	RHB	32	3000	330.0	12.4	5.3	5.3	1.1	8.0	12.0	Q2

www.ti.com 2-Feb-2018



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPA6045A4CRHBR	VQFN	RHB	32	3000	367.0	367.0	35.0
TPA6045A4CRHBR	VQFN	RHB	32	3000	367.0	367.0	35.0

RHB (S-PVQFN-N32)

PLASTIC QUAD FLATPACK NO-LEAD



NOTES: A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M—1994.

- B. This drawing is subject to change without notice.
- C. QFN (Quad Flatpack No-Lead) Package configuration.
- D. The package thermal pad must be soldered to the board for thermal and mechanical performance.
- E. See the additional figure in the Product Data Sheet for details regarding the exposed thermal pad features and dimensions.
- F. Falls within JEDEC MO-220.



RHB (S-PVQFN-N32)


PLASTIC QUAD FLATPACK NO-LEAD

THERMAL INFORMATION

This package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. The thermal pad must be soldered directly to the printed circuit board (PCB). After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For information on the Quad Flatpack No—Lead (QFN) package and its advantages, refer to Application Report, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271. This document is available at www.ti.com.

The exposed thermal pad dimensions for this package are shown in the following illustration.

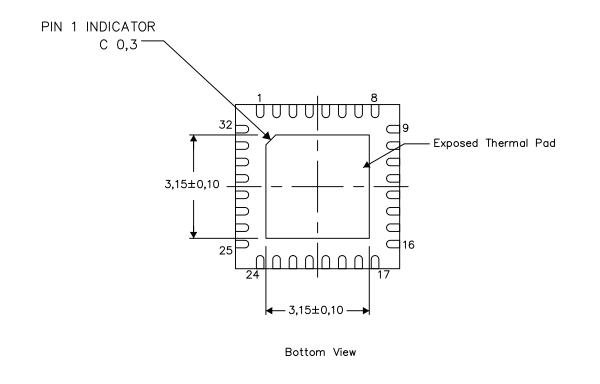

Exposed Thermal Pad Dimensions


4206356-3/AC 05/15

NOTE: A. All linear dimensions are in millimeters



RHB (S-PVQFN-N32)

PLASTIC QUAD FLATPACK NO-LEAD

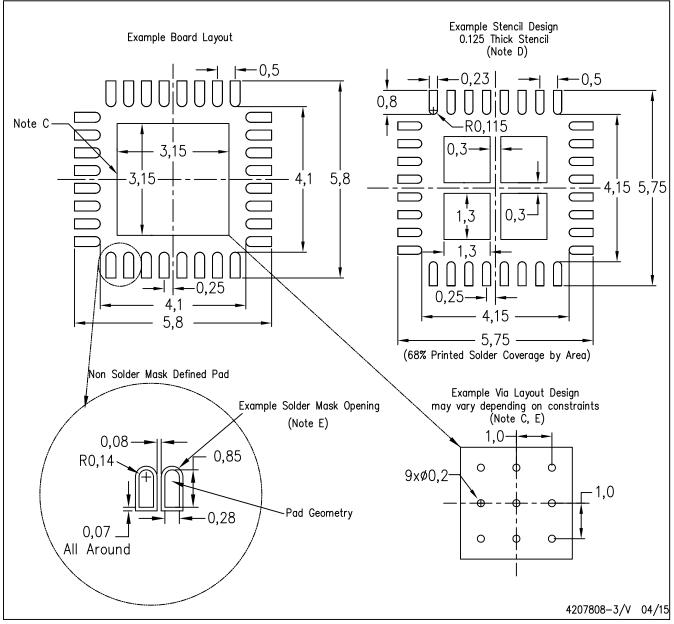

NOTES:

- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. This package is designed to be soldered to a thermal pad on the board. Refer to Application Note, Quad Flat—Pack Packages, Texas Instruments Literature No. SLUA271, and also the Product Data Sheets for specific thermal information, via requirements, and recommended board layout. These documents are available at www.ti.com http://www.ti.com.
- D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC 7525 for stencil design considerations.
- E. Customers should contact their board fabrication site for recommended solder mask tolerances and via tenting recommendations for any larger diameter vias placed in the thermal pad.



IMPORTANT NOTICE

Texas Instruments Incorporated (TI) reserves the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete.

TI's published terms of sale for semiconductor products (http://www.ti.com/sc/docs/stdterms.htm) apply to the sale of packaged integrated circuit products that TI has qualified and released to market. Additional terms may apply to the use or sale of other types of TI products and services.

Reproduction of significant portions of TI information in TI data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such reproduced documentation. Information of third parties may be subject to additional restrictions. Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyers and others who are developing systems that incorporate TI products (collectively, "Designers") understand and agree that Designers remain responsible for using their independent analysis, evaluation and judgment in designing their applications and that Designers have full and exclusive responsibility to assure the safety of Designers' applications and compliance of their applications (and of all TI products used in or for Designers' applications) with all applicable regulations, laws and other applicable requirements. Designer represents that, with respect to their applications, Designer has all the necessary expertise to create and implement safeguards that (1) anticipate dangerous consequences of failures, (2) monitor failures and their consequences, and (3) lessen the likelihood of failures that might cause harm and take appropriate actions. Designer agrees that prior to using or distributing any applications that include TI products, Designer will thoroughly test such applications and the functionality of such TI products as used in such applications.

TI's provision of technical, application or other design advice, quality characterization, reliability data or other services or information, including, but not limited to, reference designs and materials relating to evaluation modules, (collectively, "TI Resources") are intended to assist designers who are developing applications that incorporate TI products; by downloading, accessing or using TI Resources in any way, Designer (individually or, if Designer is acting on behalf of a company, Designer's company) agrees to use any particular TI Resource solely for this purpose and subject to the terms of this Notice.

TI's provision of TI Resources does not expand or otherwise alter TI's applicable published warranties or warranty disclaimers for TI products, and no additional obligations or liabilities arise from TI providing such TI Resources. TI reserves the right to make corrections, enhancements, improvements and other changes to its TI Resources. TI has not conducted any testing other than that specifically described in the published documentation for a particular TI Resource.

Designer is authorized to use, copy and modify any individual TI Resource only in connection with the development of applications that include the TI product(s) identified in such TI Resource. NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER TI INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT OF TI OR ANY THIRD PARTY IS GRANTED HEREIN, including but not limited to any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information regarding or referencing third-party products or services does not constitute a license to use such products or services, or a warranty or endorsement thereof. Use of TI Resources may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

TI RESOURCES ARE PROVIDED "AS IS" AND WITH ALL FAULTS. TI DISCLAIMS ALL OTHER WARRANTIES OR REPRESENTATIONS, EXPRESS OR IMPLIED, REGARDING RESOURCES OR USE THEREOF, INCLUDING BUT NOT LIMITED TO ACCURACY OR COMPLETENESS, TITLE, ANY EPIDEMIC FAILURE WARRANTY AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS. TI SHALL NOT BE LIABLE FOR AND SHALL NOT DEFEND OR INDEMNIFY DESIGNER AGAINST ANY CLAIM, INCLUDING BUT NOT LIMITED TO ANY INFRINGEMENT CLAIM THAT RELATES TO OR IS BASED ON ANY COMBINATION OF PRODUCTS EVEN IF DESCRIBED IN TI RESOURCES OR OTHERWISE. IN NO EVENT SHALL TI BE LIABLE FOR ANY ACTUAL, DIRECT, SPECIAL, COLLATERAL, INDIRECT, PUNITIVE, INCIDENTAL, CONSEQUENTIAL OR EXEMPLARY DAMAGES IN CONNECTION WITH OR ARISING OUT OF TI RESOURCES OR USE THEREOF, AND REGARDLESS OF WHETHER TI HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Unless TI has explicitly designated an individual product as meeting the requirements of a particular industry standard (e.g., ISO/TS 16949 and ISO 26262), TI is not responsible for any failure to meet such industry standard requirements.

Where TI specifically promotes products as facilitating functional safety or as compliant with industry functional safety standards, such products are intended to help enable customers to design and create their own applications that meet applicable functional safety standards and requirements. Using products in an application does not by itself establish any safety features in the application. Designers must ensure compliance with safety-related requirements and standards applicable to their applications. Designer may not use any TI products in life-critical medical equipment unless authorized officers of the parties have executed a special contract specifically governing such use. Life-critical medical equipment is medical equipment where failure of such equipment would cause serious bodily injury or death (e.g., life support, pacemakers, defibrillators, heart pumps, neurostimulators, and implantables). Such equipment includes, without limitation, all medical devices identified by the U.S. Food and Drug Administration as Class III devices and equivalent classifications outside the U.S.

TI may expressly designate certain products as completing a particular qualification (e.g., Q100, Military Grade, or Enhanced Product). Designers agree that it has the necessary expertise to select the product with the appropriate qualification designation for their applications and that proper product selection is at Designers' own risk. Designers are solely responsible for compliance with all legal and regulatory requirements in connection with such selection.

Designer will fully indemnify TI and its representatives against any damages, costs, losses, and/or liabilities arising out of Designer's non-compliance with the terms and provisions of this Notice.