



Features

- RoHS compliant* and halogen free**
- Surface Mount SMB package
- Breakdown Voltage: 6.8 to 550 volts
- Peak Pulse Power: 600 watts
- Typical temperature coefficient:
 $\Delta V_{BR} = 0.1 \% \times V_{BR} @ 25^\circ\text{C} \times \Delta T$

Applications

- IEC 61000-4-2 ESD (Min. Level 4)
- IEC 61000-4-4 EFT
- IEC 61000-4-5 Surge

P6SMB Transient Voltage Suppressor Diode Series

General Information

The markets of portable communications, computing and video equipment are challenging the semiconductor industry to develop increasingly smaller electronic components.

Bourns offers Transient Voltage Suppressor Diodes for surge and ESD protection applications, in compact chip package DO-214AA (SMB) size format. The Transient Voltage Suppressor series offers a choice of Breakdown Voltages from 6.8 V up to 550 V. Typical fast response times are less than 1.0 picosecond for unidirectional devices and less than 5.0 picoseconds for bidirectional devices from 0 V to Minimum Breakdown Voltage.

Bourns® Chip Diodes conform to JEDEC standards, are easy to handle with standard pick and place equipment and the flat configuration minimizes roll away.

Maximum Characteristics (@ $T_A = 25^\circ\text{C}$ Unless Otherwise Noted)

| Parameter | Symbol | Value | Unit |
|--|-----------|-------------|------------------|
| Peak Pulse Power Dissipation ($T_P = 1\text{ ms}$) (Note 1,2) | P_{PK} | 600 | Watts |
| Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method) (Note 3) | I_{FSM} | 100 | Amps |
| Maximum Instantaneous Forward Voltage @ $I_{PP} = 50\text{ A}$ (For Unidirectional Units Only) | V_F | 3.5 5.0 | Volts |
| Operating Temperature Range | T_J | -55 to +150 | $^\circ\text{C}$ |
| Storage Temperature Range | T_{STG} | -55 to +150 | $^\circ\text{C}$ |

1. Non-repetitive current pulse, per Pulse Waveform graph and derated above $T_A = 25^\circ\text{C}$ per Pulse Derating Curve.
2. Thermal Resistance Junction to Lead.
3. 8.3 ms Single Half-Sine Wave duty cycle = 4 pulses maximum per minute (unidirectional units only).

BOURNS®

Asia-Pacific:

Tel: +886-2 2562-4117

Fax: +886-2 2562-4116

EMEA:

Tel: +36 88 520 390

Fax: +36 88 520 211

The Americas:

Tel: +1-951 781-5500

Fax: +1-951 781-5700

www.bourns.com

How to Order

P6SMB 6.8 CA

Series _____
P6SMB= SMB/DO-214AA

Breakdown Voltage _____
6.8 to 550 = 6.8 to 550 V_{BD} (Volts)

Suffix _____
A = 5 % Tolerance Unidirectional Device
CA = 5 % Tolerance Bidirectional Device

* RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.

**Bourns considers a product to be "halogen free" if (a) the Bromine (Br) content is 900 ppm or less; (b) the Chlorine (Cl) content is 900 ppm or less; and (c) the total Bromine (Br) and Chlorine (Cl) content is 1500 ppm or less.

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.

Users should verify actual device performance in their specific applications.

P6SMB Transient Voltage Suppressor Diode Series

Electrical Characteristics (@ $T_A = 25\text{ }^\circ\text{C}$ Unless Otherwise Noted)

| Unidirectional Device | | Bidirectional Device | | Breakdown Voltage V_{BR} (Volts) | | | Working Peak Reverse Voltage | Maximum Reverse Leakage @ V_{RWM} | Maximum Reverse Voltage @ I_{RSM} | Maximum Reverse Surge Current |
|-----------------------|---------|----------------------|---------|------------------------------------|-------|--------------|------------------------------|-------------------------------------|-------------------------------------|-------------------------------|
| Part No. | Marking | Part No. | Marking | Min. | Max. | @ I_T (mA) | V_{RWM} (V) | I_R (μ A) | V_{RSM} (V) | I_{RSM} (A) |
| P6SMB6.8A | 6V8A | P6SMB6.8CA | 6V8C | 6.45 | 7.14 | 10 | 5.8 | 1000 | 10.5 | 58.1 |
| P6SMB7.5A | 7V5A | P6SMB7.5CA | 7V5C | 7.13 | 7.88 | 10 | 6.4 | 500 | 11.3 | 54 |
| P6SMB8.2A | 8V2A | P6SMB8.2CA | 8V2C | 7.79 | 8.61 | 10 | 7.02 | 200 | 12.1 | 50.4 |
| P6SMB9.1A | 9V1A | P6SMB9.1CA | 9V1C | 8.65 | 9.55 | 1 | 7.78 | 50 | 13.4 | 45.5 |
| P6SMB10A | 10A | P6SMB10CA | 10C | 9.5 | 10.5 | 1 | 8.55 | 10 | 14.5 | 42.1 |
| P6SMB11A | 11A | P6SMB11CA | 11C | 10.5 | 11.6 | 1 | 9.4 | 5 | 15.6 | 39.1 |
| P6SMB12A | 12A | P6SMB12CA | 12C | 11.4 | 12.6 | 1 | 10.2 | 5 | 16.7 | 36.5 |
| P6SMB13A | 13A | P6SMB13CA | 13C | 12.4 | 13.7 | 1 | 11.1 | 1 | 18.2 | 33.5 |
| P6SMB15A | 15A | P6SMB15CA | 15C | 14.3 | 15.8 | 1 | 12.8 | 1 | 21.2 | 28.8 |
| P6SMB16A | 16A | P6SMB16CA | 16C | 15.2 | 16.8 | 1 | 13.6 | 1 | 22.5 | 27.1 |
| P6SMB18A | 18A | P6SMB18CA | 18C | 17.1 | 18.9 | 1 | 15.3 | 1 | 25.5 | 24.2 |
| P6SMB20A | 20A | P6SMB20CA | 20C | 19 | 21 | 1 | 17.1 | 1 | 27.7 | 22 |
| P6SMB22A | 22A | P6SMB22CA | 22C | 20.9 | 23.1 | 1 | 18.8 | 1 | 30.6 | 19.9 |
| P6SMB24A | 24A | P6SMB24CA | 24C | 22.8 | 25.2 | 1 | 20.5 | 1 | 33.2 | 18.4 |
| P6SMB27A | 27A | P6SMB27CA | 27C | 25.7 | 28.4 | 1 | 23.1 | 1 | 37.5 | 16.3 |
| P6SMB30A | 30A | P6SMB30CA | 30C | 28.5 | 31.5 | 1 | 25.6 | 1 | 41.4 | 14.7 |
| P6SMB33A | 33A | P6SMB33CA | 33C | 31.4 | 34.7 | 1 | 28.2 | 1 | 45.7 | 13.3 |
| P6SMB36A | 36A | P6SMB36CA | 36C | 34.2 | 37.8 | 1 | 30.8 | 1 | 49.9 | 12.2 |
| P6SMB39A | 39A | P6SMB39CA | 39C | 37.1 | 41 | 1 | 33.3 | 1 | 53.9 | 11.3 |
| P6SMB43A | 43A | P6SMB43CA | 43C | 40.9 | 45.2 | 1 | 36.8 | 1 | 59.3 | 10.3 |
| P6SMB47A | 47A | P6SMB47CA | 47C | 44.7 | 49.4 | 1 | 40.2 | 1 | 64.8 | 9.4 |
| P6SMB51A | 51A | P6SMB51CA | 51C | 48.5 | 53.6 | 1 | 43.6 | 1 | 70.1 | 8.7 |
| P6SMB56A | 56A | P6SMB56CA | 56C | 53.2 | 58.8 | 1 | 47.8 | 1 | 77 | 7.9 |
| P6SMB62A | 62A | P6SMB62CA | 62C | 58.9 | 65.1 | 1 | 53 | 1 | 85 | 7.2 |
| P6SMB68A | 68A | P6SMB68CA | 68C | 64.6 | 71.4 | 1 | 58.1 | 1 | 92 | 6.6 |
| P6SMB75A | 75A | P6SMB75CA | 75C | 71.3 | 78.8 | 1 | 64.1 | 1 | 103 | 5.9 |
| P6SMB82A | 82A | P6SMB82CA | 82C | 77.9 | 86.1 | 1 | 70.1 | 1 | 113 | 5.4 |
| P6SMB91A | 91A | P6SMB91CA | 91C | 86.5 | 95.5 | 1 | 77.8 | 1 | 125 | 4.9 |
| P6SMB100A | 100A | P6SMB100CA | 100C | 95 | 105 | 1 | 85.5 | 1 | 137 | 4.5 |
| P6SMB110A | 110A | P6SMB110CA | 110C | 105 | 116 | 1 | 94 | 1 | 152 | 4 |
| P6SMB120A | 120A | P6SMB120CA | 120C | 114 | 126 | 1 | 102 | 1 | 165 | 3.7 |
| P6SMB130A | 130A | P6SMB130CA | 130C | 124 | 137 | 1 | 111 | 1 | 179 | 3.4 |
| P6SMB150A | 150A | P6SMB150CA | 150C | 143 | 158 | 1 | 128 | 1 | 207 | 2.9 |
| P6SMB160A | 160A | P6SMB160CA | 160C | 152 | 168 | 1 | 136 | 1 | 219 | 2.8 |
| P6SMB170A | 170A | P6SMB170CA | 170C | 162 | 179 | 1 | 145 | 1 | 234 | 2.6 |
| P6SMB180A | 180A | P6SMB180CA | 180C | 171 | 189 | 1 | 154 | 1 | 246 | 2.5 |
| P6SMB200A | 200A | P6SMB200CA | 200C | 190 | 210 | 1 | 171 | 1 | 274 | 2.2 |
| P6SMB220A | 220A | P6SMB220CA | 220C | 209 | 231 | 1 | 185 | 1 | 328 | 1.9 |
| P6SMB250A | 250A | P6SMB250CA | 250C | 237 | 263 | 1 | 214 | 1 | 344 | 1.8 |
| P6SMB300A | 300A | P6SMB300CA | 300C | 285 | 315 | 1 | 256 | 1 | 414 | 1.5 |
| P6SMB350A | 350A | P6SMB350CA | 350C | 332 | 368 | 1 | 300 | 1 | 482 | 1.3 |
| P6SMB400A | 400A | P6SMB400CA | 400C | 380 | 420 | 1 | 342 | 1 | 548 | 1.1 |
| P6SMB440A | 440A | P6SMB440CA | 440C | 418 | 462 | 1 | 376 | 1 | 602 | 1 |
| P6SMB480A | 480A | P6SMB480CA | 480C | 456 | 504 | 1 | 408 | 1 | 658 | 0.9 |
| P6SMB510A | 510A | P6SMB510CA | 510C | 485 | 535 | 1 | 434 | 1 | 698 | 0.9 |
| P6SMB530A | 530A | P6SMB530CA | 530C | 503.5 | 556.5 | 1 | 477 | 1 | 725 | 0.8 |
| P6SMB540A | 540A | P6SMB540CA | 540C | 513 | 567 | 1 | 486 | 1 | 740 | 0.8 |
| P6SMB550A | 550A | P6SMB550CA | 550C | 522.5 | 577.5 | 1 | 495 | 1 | 760 | 0.8 |

Notes:

1. Suffix 'A' denotes a 5 % tolerance unidirectional device.
2. Suffix 'CA' denotes a 5 % tolerance bidirectional device.
3. For bidirectional devices with a V_{BR} of 10 volts or less, the I_P limit is double.

Specifications are subject to change without notice.


The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

P6SMB Transient Voltage Suppressor Diode Series


BOURNS®

Rating & Characteristic Curves


Pulse Derating Curve

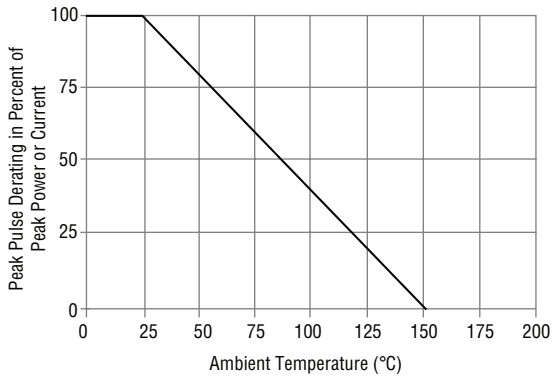


Maximum Non-Repetitive Surge Current

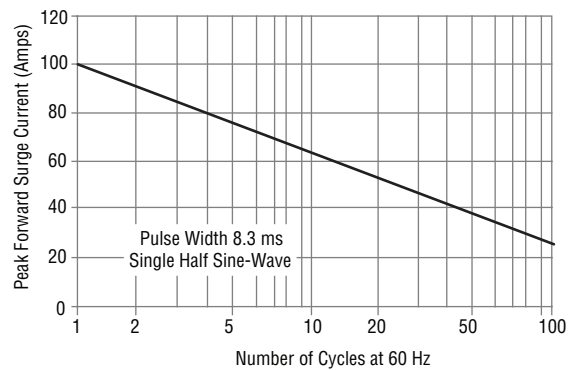


Pulse Waveform

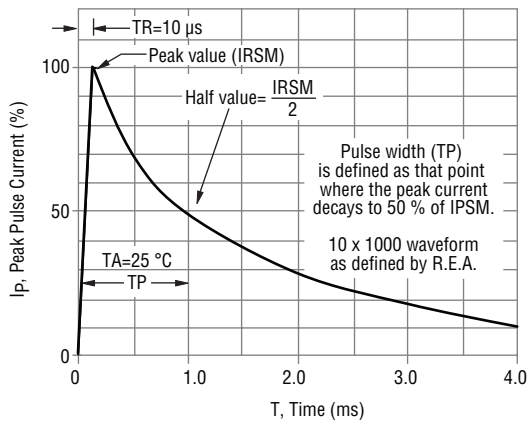


Typical Junction Capacitance

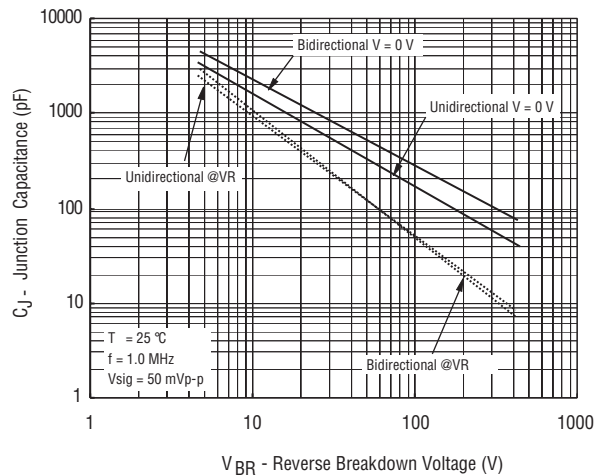

Pulse Rating Curve

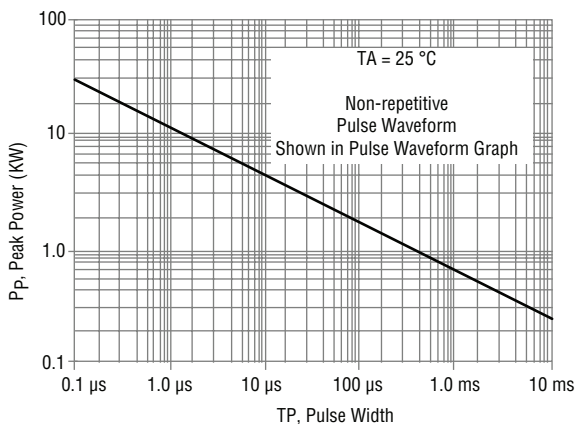

Steady State Power Derating Curve

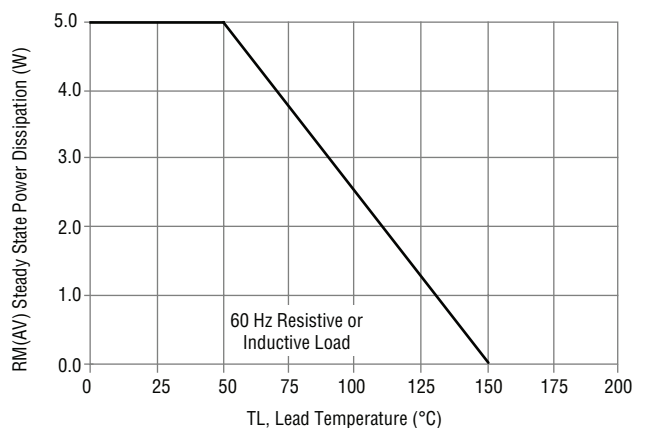


Specifications are subject to change without notice. The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

P6SMB Transient Voltage Suppressor Diode Series

BOURNS®


Product Dimensions

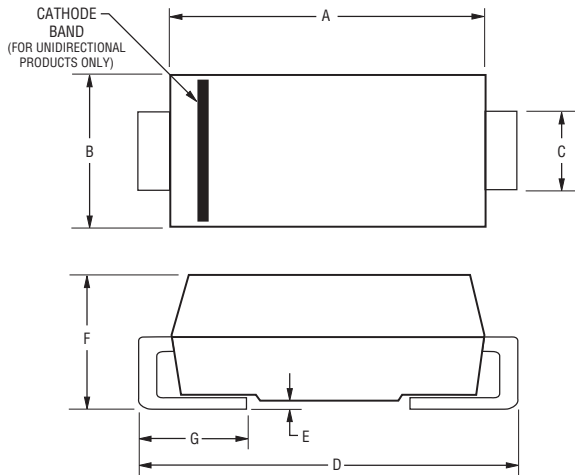

| Dimension | SMB (DO-214AA) |
|-----------|--|
| A | $\frac{4.06 - 4.57}{(0.160 - 0.180)}$ |
| B | $\frac{3.30 - 3.94}{(0.130 - 0.155)}$ |
| C | $\frac{1.95 - 2.20}{(0.077 - 0.087)}$ |
| D | $\frac{5.21 - 5.59}{(0.205 - 0.220)}$ |
| E | $\frac{0.05 - 0.203}{(0.002 - 0.008)}$ |
| F | $\frac{2.13 - 2.44}{(0.080 - 0.103)}$ |
| G | $\frac{0.76 - 1.52}{(0.030 - 0.060)}$ |

DIMENSIONS: $\frac{\text{MM}}{\text{(INCHES)}}$

Recommended Footprint

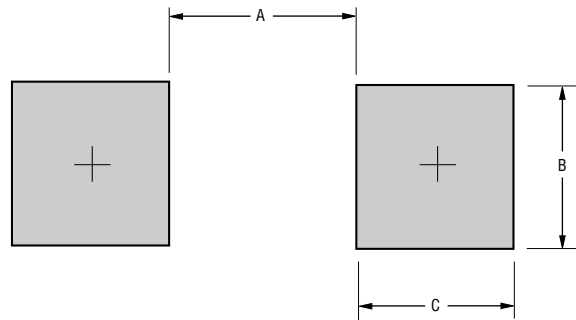

| Dimension | SMB (DO-214AA) |
|-----------|------------------------|
| a (Max.) | $\frac{2.69}{(0.106)}$ |
| b (Min.) | $\frac{2.10}{(0.083)}$ |
| c (Min.) | $\frac{1.27}{(0.050)}$ |

DIMENSIONS: $\frac{\text{MM}}{\text{(INCHES)}}$

Physical Specifications

CaseMolded plastic per UL Class 94V-0
 Polarity..... Cathode band indicates unidirectional device
 No cathode band indicates bidirectional device

Environmental Specifications


Moisture Sensitivity Level1
 ESD Classification (HBM)..... 3B

P6SMB Transient Voltage Suppressor Diode Series

BOURNS®

Packaging Information

The product will be dispensed in tape and reel format (see diagram below).

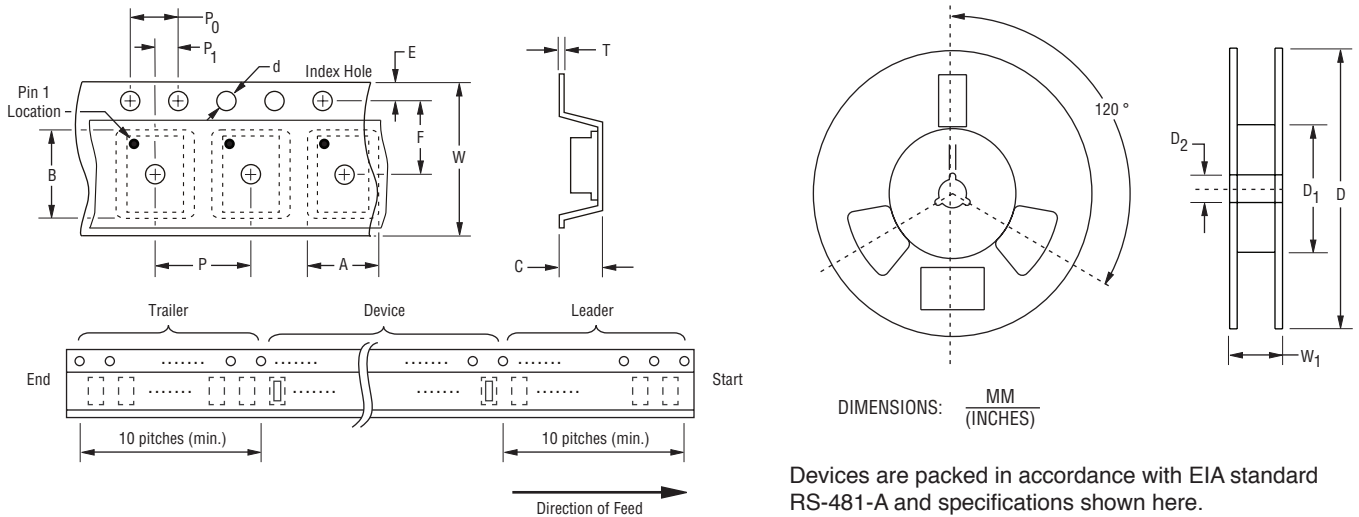

Devices are packed in accordance with EIA standard RS-481-A and specifications shown here.

| Item | Symbol | SMB (DO-214AA) |
|------------------------|----------------|-------------------------------------|
| Carrier Width | A | 3.67 ± 0.20 (0.144 ± 0.008) |
| Carrier Length | B | 5.60 ± 0.20 (0.220 ± 0.008) |
| Carrier Depth | C | 2.57 ± 0.20 (0.101 ± 0.008) |
| Sprocket Hole | d | 1.50 ± 0.10 (0.059 ± 0.004) |
| Reel Outside Diameter | D | 330 (12.992) |
| Reel Inner Diameter | D ₁ | 50.0 (1.969) MIN. |
| Feed Hole Diameter | D ₂ | 13.0 ± 0.20 (0.512 ± 0.008) |
| Sprocket Hole Position | E | 1.75 ± 0.10 (0.069 ± 0.004) |
| Punch Hole Position | F | 5.50 ± 0.05 (0.217 ± 0.002) |
| Punch Hole Pitch | P | 8.00 ± 0.10 (0.315 ± 0.004) |
| Sprocket Hole Pitch | P ₀ | 4.00 ± 0.10 (0.157 ± 0.004) |
| Embossment Center | P ₁ | 2.00 ± 0.05 (0.079 ± 0.002) |
| Overall Tape Thickness | T | 0.30 ± 0.10 (0.012 ± 0.004) |
| Tape Width | W | 12.00 ± 0.30 (0.472 ± 0.012) |
| Reel Width | W ₁ | 18.4 (0.724) MAX. |
| Quantity per Reel | -- | 3,000 |

REV. 07/17

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.