



Mini-Circuits

SURFACE MOUNT ^{top hat}

Power Splitter/Combiner TCP-2-152-75X+

75Ω 2 Way-0° 5 to 1500 MHz

FEATURES

- Low insertion, 0.8 dB typ.
- Excellent amplitude unbalance, 0.2 dB typ.
- Very good phase unbalance, 1.5 deg. typ.
- External resistor & capacitor required
- Aqueous washable
- Leads for excellent solderability
- Low cost



Generic photo used for illustration purposes only

CASE STYLE: DB1627

APPLICATIONS

- DOCSIS® 3.1 Systems
- VHF/UHF
- CATV
- Cellular

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

ELECTRICAL SPECIFICATIONS AT 25°C


Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		5		1500	MHz
Insertion Loss, above 3.0 dB	5 - 50	—	0.4	0.7	dB
	50 - 1000	—	0.7	1.2	
	1000 - 1250	—	1.0	1.7	
	1250 - 1500	—	1.3	2.7	
Isolation	5 - 50	22	28	—	dB
	50 - 1000	21	28	—	
	1000 - 1250	20	28	—	
	1250 - 1500	16	25	—	
Phase Unbalance	5 - 50	—	1.0	3.0	Degree
	50 - 1000	—	1.5	4.0	
	1000 - 1250	—	2.0	5.0	
	1250 - 1500	—	2.0	6.0	
Amplitude Unbalance	5 - 50	—	0.2	0.4	dB
	50 - 1000	—	0.2	0.5	
	1000 - 1250	—	0.25	0.6	
	1250 - 1500	—	0.30	0.7	
VSWR (Port S)	5 - 50	—	1.08	1.15	:1
	50 - 1000	—	1.15	1.3	
	1000 - 1250	—	1.25	1.45	
	1250 - 1500	—	1.3	1.75	
VSWR (Port 1-2)	5 - 50	—	1.3	1.5	:1
	50 - 1000	—	1.2	1.35	
	1000 - 1250	—	1.3	1.6	
	1250 - 1500	—	1.55	1.95	

MAXIMUM RATINGS

Parameter	Ratings
Operating temperature	-40°C to 85°C
Storage temperature	-55°C to 100°C
RF Power Input (as splitter)	0.5 W max.

Permanent damage may occur if any of these limits are exceeded.

FUNCTIONAL SCHEMATIC

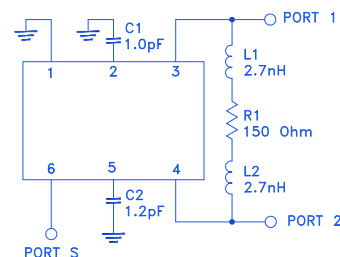




Power Splitter/Combiner **TCP-2-152-75X+**

PIN CONNECTIONS

SUM PORT	6
PORT 1	3
PORT 2	4
GROUND	1
EXT. CAPACITOR 1.0 pF	2 TO GND
EXT. CAPACITOR 1.2pF	5 TO GND
EXT. COMPONENTS (INDUCTOR 2.7 nH, RESISTOR 150Ω, INDUCTOR 2.7nH IN SERIES)	3,4

PRODUCT MARKING: SW

DEMO BOARD MCL P/N: TB-835
SUGGESTED PCB LAYOUT (PL-457)

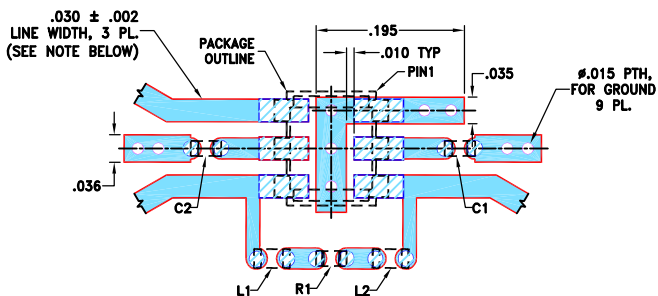


COMPONENT	SIZE
L1, L2	0402
C1, C2	0402
R1	0402

NOTES:


- TRACE WIDTH PARAMETERS ARE SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030"±.002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

OUTLINE DRAWING

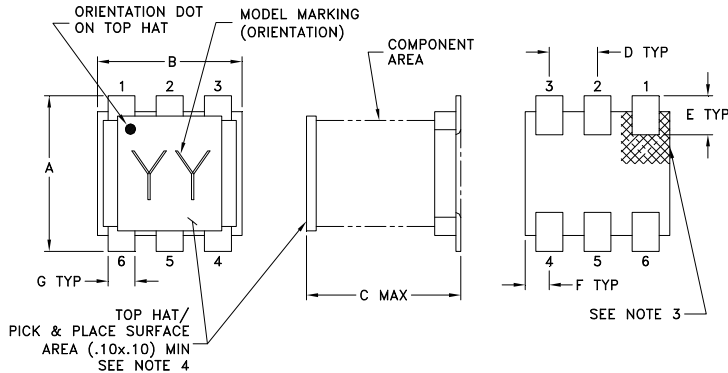

PCB Land Pattern



SUGGESTED LAYOUT
 TOLERANCE TO BE WITHIN ±.002

OUTLINE DIMENSIONS (Inches/mm)

A	B	C	D	E	F
.160	.150	.160	.050	.040	.025
4.06	3.81	4.06	1.27	1.02	0.64
G	H	J	K	wt	
.028	.065	.190	.030	grams	
0.71	1.65	4.83	0.76	0.15	

TAPE & REEL INFORMATION: F47




Power Splitter/Combiner **TCP-2-152-75X+**

TYPICAL PERFORMANCE DATA AT 25°C


Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR (:1)		
	S-1	S-2				S	1	2
5	3.46	3.24	0.22	27.24	0.82	1.08	1.34	1.27
50	3.42	3.24	0.19	35.10	0.05	1.06	1.25	1.20
100	3.44	3.25	0.19	34.55	0.19	1.07	1.24	1.20
150	3.45	3.27	0.19	34.13	0.30	1.07	1.23	1.20
200	3.46	3.28	0.18	33.83	0.39	1.08	1.23	1.18
300	3.48	3.30	0.18	33.30	0.56	1.10	1.21	1.17
400	3.49	3.32	0.17	33.19	0.71	1.11	1.18	1.16
500	3.51	3.36	0.15	33.41	0.80	1.13	1.16	1.16
600	3.53	3.40	0.13	33.62	0.90	1.14	1.13	1.15
700	3.55	3.45	0.10	34.18	0.99	1.15	1.10	1.15
800	3.58	3.51	0.07	35.21	1.03	1.16	1.08	1.16
900	3.63	3.59	0.04	36.95	1.06	1.16	1.08	1.17
1000	3.68	3.68	0.01	39.83	1.09	1.16	1.12	1.19
1250	3.88	3.97	0.10	33.87	1.19	1.16	1.24	1.25
1500	4.27	4.41	0.14	23.17	1.56	1.20	1.38	1.32

1. Total Loss = Insertion Loss + 3dB splitter loss.


TCP-2-152-75X+
TOTAL LOSS

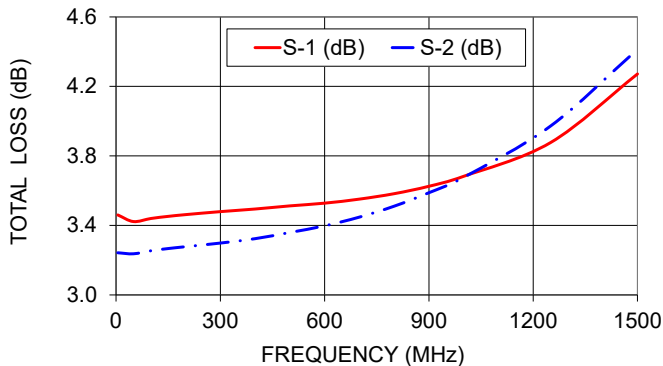

TCP-2-152-75X+
ISOLATION

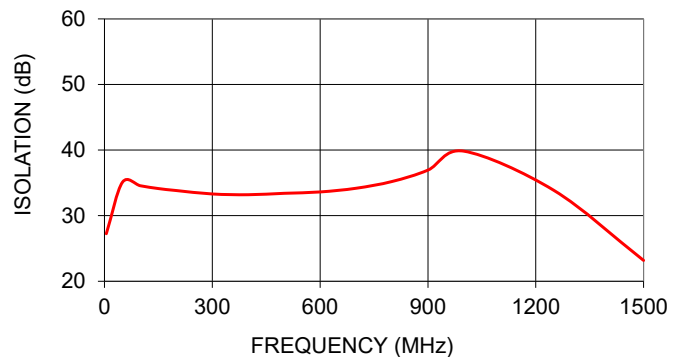

TCP-2-152-75X+
VSWR

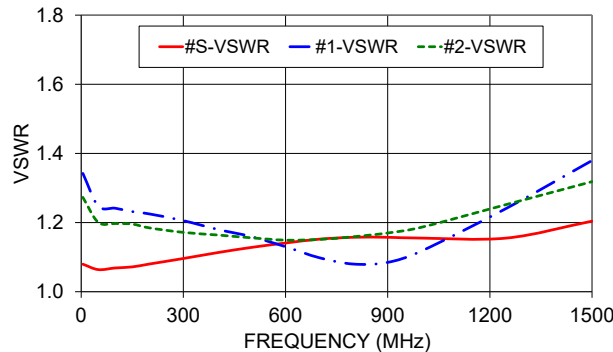

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html