

Is Now Part of



# **ON Semiconductor**®

# To learn more about ON Semiconductor, please visit our website at <u>www.onsemi.com</u>

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (\_), the underscore (\_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (\_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at <a href="mailto:www.onsemi.com">www.onsemi.com</a>. Please email any questions regarding the system integration to <a href="mailto:Fairchild\_questions@onsemi.com">Fairchild\_questions@onsemi.com</a>.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or unavteries, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out or i, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor and is officers, employees, uniotificated use, even if such claim any manner.

March 2015



# 74VHC14 Hex Schmitt Inverter

### Features

- High Speed:  $t_{PD}$  = 5.5 ns (Typ.) at V<sub>CC</sub> = 5 V
- Low Power Dissipation:  $I_{CC} = 2 \mu A$  (Max.) at  $T_A = 25^{\circ}C$
- High Noise Immunity:  $V_{NIH} = V_{NIL} = 28\% V_{CC}$  (Min.)
- · Power down protection is provided on all inputs
- Low Noise: V<sub>OLP</sub> = 0.8 V (Max.)
- Pin and Function Compatible with 74HC14

### **General Description**

The VHC14 is an advanced high speed CMOS Hex Schmitt Inverter fabricated with silicon gate CMOS technology. It achieves the high speed operation similar to equivalent Bipolar Schottky TTL while maintaining the CMOS low power dissipation. Pin configuration and function are the same as the VHC04 but the inputs have hysteresis between the positive-going and negative-going input thresholds, which are capable of transforming slowly changing input signals into sharply defined, jitterfree output signals, thus providing greater noise margin than conventional inverters.


An input protection circuit ensures that 0 V to 7 V can be applied to the input pins without regard to the supply voltage. This device can be used to interface 5 V to 3 V systems and two supply systems such as battery back up. This circuit prevents device destruction due to mismatched supply and input voltages.

Part Number	Top Mark	Package	Packing Method			
74VHC14M	74VHC14	SOIC 14L	Rail			
74VHC14MX	74VHC14	SOIC 14L	Tape and Reel			
74VHC14SJX	VHC14	SOP 14L	Tape and Reel			
74VHC14MTC	V14	TSSOP 14L	Rail			
74VHC14MTCX	V14	TSSOP 14L	Tape and Reel			

#### **Ordering Information**

# Logic Symbol/s IEEE/IEC $A_0$ 1 $\overline{o}_0$ $\overline{o}_1$ $\overline{o}_2$ $\overline{o}_3$ $A_4$ $A_5$ $\overline{o}_4$ $\overline{o}_5$

# **Connection Diagram/s**



# **Pin Descriptions**

Pin Names	Description				
A <sub>n</sub>	Inputs				
Ōn	Outputs				

# Truth Table/s

A	0
L	н
н	L

# Absolute Maximum Ratings<sup>(1)</sup>

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

Symbol	Parameter	Value	Unit
V <sub>CC</sub>	Supply Voltage	-0.5 to +7.0	V
V <sub>IN</sub>	DC Input Voltage	-0.5 to +7.0	V
V <sub>OUT</sub>	DC Output Voltage	-0.5 to V <sub>CC</sub> +0.5	V
Ι <sub>ΙΚ</sub>	Input Diode Current	-20	mA
Ι <sub>ΟΚ</sub>	Output Diode Current	±20	mA
I <sub>OUT</sub>	DC Output Current	±25	mA
I <sub>CC</sub>	DC V <sub>CC</sub> / GND Current	±50	mA
T <sub>STG</sub>	Storage Temperature Range	-65 to +150	°C
ΤL	Lead Temperature (Soldering 10 seconds)	260	°C

#### Note:

1. Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. The data book specifications should be met, without exception, to ensure that the system design is reliable over its power supply, temperature, and output/input loading variables. Fairchild does not recommend operation outside databook specifications.

## **Recommended Operating Conditions**<sup>(2)</sup>

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. Fairchild does not recommend exceeding them or designing to absolute maximum ratings.

Symbol	Parameter	Min.	Max.	Unit
V <sub>CC</sub>	Supply Voltage	2.0	5.5	V
V <sub>IN</sub>	Input Voltage	0	5.5	V
V <sub>OUT</sub>	Output Voltage	0	V <sub>CC</sub>	V
T <sub>OPR</sub>	Operating Temperature Range	-40	85	°C

Note:

2. Unused inputs must be held HIGH or LOW. They may not float.

# **DC Electrical Characteristics**

Symbol	Parameter	V		T <sub>A</sub> = 25°0	C	T <sub>A</sub> = -40 to 85°C		Unit	Conditions	
Symbol	Farameter	v <sub>cc</sub>	Min.	Тур.	Max.	Min.	Max.	Unit	Con	aitions
	/.	3.0			2.20		2.20			
VP	Positive Threshold	4.5			3.15		3.15	V		
	Voltage	5.5			3.85		3.85			
		3.0	0.90			0.90				
V <sub>N</sub>	Negative	4.5	1.35			1.35		V		
	Threshold Voltage	5.5	1.65			1.65				
		3.0	0.30		1.20	0.30	1.20			
$V_{H}$	Hysteresis Voltage	4.5	0.40		1.40	0.40	1.40	V		
		5.5	0.50		1.60	0.50	1.60			
	HIGH Level Output Voltage	2.0	1.9	2.0		1.9		v		
		3.0	2.9	3.0		2.9				I <sub>OH</sub> = -50 μA
V <sub>OH</sub>		4.5	4.4	4.5		4.4				
		3.0	2.58			2.48				I <sub>OH</sub> = -4 mA
		4.5	3.94			3.80				
		2.0		0.0	0.1		0.1			
		3.0		0.0	0.1		0.1		., .,	I <sub>OL</sub> = 50 μA
V <sub>OL</sub>	LOW Level Output	4.5		0.0	0.1		0.1	V	$V_{IN} = V_{IH}$	
	Voltage	3.0			0.36		0.44			$I_{OL} = 4 \text{ mA}$
		4.5			0.36		0.44			$I_{OL} = 8 \text{ mA}$
I <sub>IN</sub>	Input Leakage Current	0 - 5.5			±0.1		±1.0	μA	V <sub>IN</sub> = 5.5 V	v or GND
I <sub>CC</sub>	Quiescent Supply Current	5.5			2.0		20.0	μA	$V_{IN} = V_{CC}$	or GND

# Noise Characteristics<sup>(2)</sup>

Symbol	Parameter	v <sub>cc</sub>	T <sub>A</sub> = 25°C		Unit	Conditions	
	i didineter		Тур.	Max.	Onic		
V <sub>OLP</sub>	Quiet Output Maximum Dynamic V <sub>OL</sub>	5.0	0.4	0.8	V	C <sub>L</sub> = 50 pF	
V <sub>OLV</sub>	Quiet Output Minimum Dynamic V <sub>OL</sub>	5.0	-0.4	0.8	V	C <sub>L</sub> = 50 pF	
V <sub>IHD</sub>	Minimum HIGH Level Dynamic Input Voltage	5.0		3.5	V	C <sub>L</sub> = 50 pF	
V <sub>ILD</sub>	Maximum LOW Level Dynamic Input Voltage	5.0		1.5	V	C <sub>L</sub> = 50 pF	

#### Note:

2. Parameter guaranteed by design.

# **AC Electrical Characteristics**


Symbol	Parameter	v <sub>cc</sub>	T <sub>A</sub> = 25°C			$T_{A} = -40$	to 85°C	Unit	Conditions
			Min.	Тур.	Max.	Min.	Max.	onit	conditions
	Propagation Delay Time	3.3 ± 0.3		8.3	12.8	1.0	15.0		C <sub>L</sub> = 15 pF
t <sub>PLH</sub>		$3.3 \pm 0.3$		10.8	16.3	1.0	18.5	-	$C_L = 50 \text{ pF}$
t <sub>PHL</sub>		5.0 ± 0.5		5.5	8.6	1.0	10.0	ns	C <sub>L</sub> = 15 pF
		$5.0 \pm 0.5$		7.0	10.6	1.0	12.0		C <sub>L</sub> = 50 pF
C <sub>IN</sub>	Input Capacitance			4	10		10	pF	V <sub>CC</sub> = Open
C <sub>PD</sub>	Power Dissipation Capacitance			21				pF	(3)

#### Note:


3. C<sub>PD</sub> is defined as the value of the internal equivalent capacitance which is calculated from the opening current consumption without load.

Average operating current can be obtained by the equation:  $I_{CC}$  (Opr) =  $C_{PD} * V_{CC} * f_{IN} + I_{CC} / 6$  (per Gate)




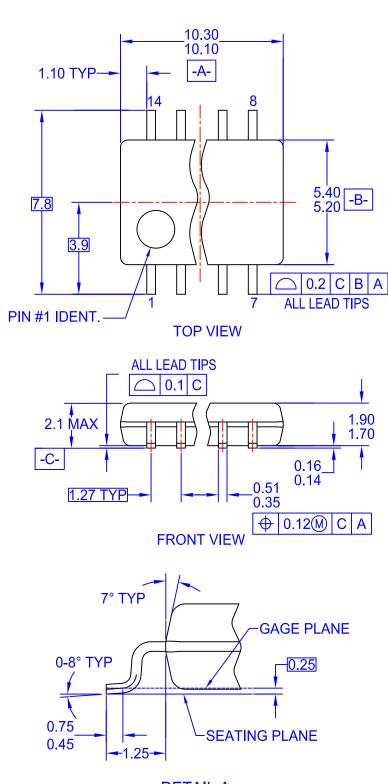



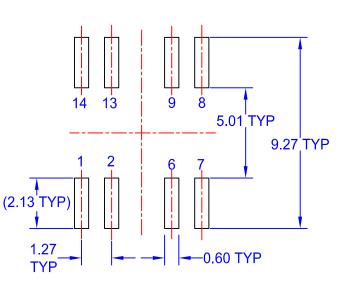

LAND PATTERN RECOMMENDATION

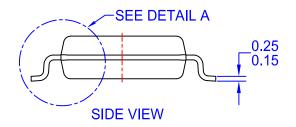

## NOTES:

- A. CONFORMS TO EIAJ EDR-7320 REGISTRATION, ESTABLISHED IN DECEMBER, 1998.
- B. DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.
- D. DRAWING FILENAME: MKT-M14Drev4.





ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor has against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death ass

#### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81-3-5817-1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

© Semiconductor Components Industries, LLC